

ENHANCEMENT OF THE TRAVELING FRONT SPEEDS IN REACTION-DIFFUSION EQUATIONS WITH ADVECTION

Alexander KISELEV, Leonid RYZHIK

Department of Mathematics, University of Chicago, Chicago, IL 60637, USA

Received 2 March 2000

ABSTRACT. – We establish rigorous lower bounds on the speed of traveling fronts and on the bulk burning rate in reaction-diffusion equation with passive advection. The non-linearity is assumed to be of either KPP or ignition type. We consider two main classes of flows. Percolating flows, which are characterized by the presence of long tubes of streamlines mixing hot and cold material, lead to strong speed-up of burning which is linear in the amplitude of the flow, U . On the other hand the cellular flows, which have closed streamlines, are shown to produce weaker increase in reaction. For such flows we get a lower bound which grows as $U^{1/5}$ for a large amplitude of the flow.

© 2001 L'Association Publications de l'Institut Henri Poincaré. Published by Elsevier B.V. All rights reserved

RÉSUMÉ. – Nous établissons rigoureusement une estimation inférieure de la vitesse de propagation de fronts et du taux global de combustion pour des équations de réaction-diffusion avec convection donnée. La non-linéarité est de type KPP ou de type “ignition”. Nous considérons deux principales classes d’écoulements. Les écoulements de percolation, caractérisés par la présence de longs tubes de lignes de courant mélangeant des régions chaudes et froides, entraînent une accélération importante du taux de combustion, linéaire en fonction de l’intensité U de l’écoulement. D’autre part, les écoulements circulaires, avec lignes de champs fermées, conduisent à une augmentation plus faible du taux de réaction. Pour de tels écoulements, nous obtenons une estimation inférieure qui croît comme $U^{1/5}$ pour des écoulements de grande amplitude. © 2001 Éditions scientifiques et médicales Elsevier SAS

1. Introduction

Propagation of thin fronts in moving fluids arises in many situations in physics and engineering. Consider a mixture of reactants interacting in a region that may have a rather complicated spatial structure but is thin across. The reaction front moves towards the unburned reactants leaving behind the burned ones. When the reactants are mixed by an ambient fluid then the burning rate may be enhanced. The physical reason for this observed speed-up is believed to be that fluid advection tends to increase the area

available for reaction. Many important engineering applications of combustion operate in the presence of turbulent advection, and therefore the influence of advection on burning has been studied extensively by physicists, engineers and mathematicians. In the physical literature one can find a number of models and approaches that yield different predictions – relations between the turbulent intensity and the burning rate [8,19,20,34]. These results are usually obtained using heuristic models and physical reasoning. For a recent review of some of the physics literature we refer to [27,29].

The lack of agreement between different physical models makes rigorous results, even for simplified mathematical models, particularly valuable and useful. A well-established mathematical model that describes a chemical reaction in a fluid is a system of two equations for concentration C and temperature T of the form

$$T_t + u \cdot \nabla T = \kappa \Delta T + \frac{v_0^2}{\kappa} g(T)C, \quad (1.1)$$

$$C_t + u \cdot \nabla C = \frac{\kappa}{\text{Le}} \Delta C - \frac{v_0^2}{\kappa} g(T)C.$$

For exposition purposes, all consideration in this paper will be carried out in two spacial dimensions, but our methods extend to an arbitrary dimension in a straightforward way. Eqs. (1.1) are coupled to the reactive Euler equations for the advection velocity $u(x, y, t)$. Two assumptions are usually made to simplify the problem: first, constant density approximation [8] that allows to decouple the Euler equations from the system (1.1). Then one may consider $u(x, y, t)$ as a prescribed quantity that does not depend on T and C . Furthermore, it is often assumed that $\text{Le} = 1$, or, equivalently, thermal and material diffusivities are equal. These two assumptions allow to reduce the above system to a single scalar equation for the temperature T :

$$\frac{\partial T}{\partial t} + u(x, y, t) \cdot \nabla T = \kappa \Delta T + \frac{v_0^2}{\kappa} f(T) \quad (1.2)$$

with $f(T) = g(T)(1 - T)$, provided that $C(x, y, 0) = 1 - T(x, y, 0)$. We will consider the problem (1.2) in a strip $\Omega = \mathbb{R}_x \times [0, H]_y$ with boundary conditions in x :

$$T(x, y, t) \rightarrow 1 \quad \text{as } x \rightarrow -\infty, \quad T(x, y, t) \rightarrow 0 \quad \text{as } x \rightarrow +\infty \quad (1.3)$$

and either Neumann

$$\frac{\partial T}{\partial y}(x, 0, t) = \frac{\partial T}{\partial y}(x, H, t) = 0, \quad (1.4)$$

or periodic

$$T(x, y, t) = T(x, y + H, t) \quad (1.5)$$

boundary conditions in y . Furthermore, we assume that the initial data $T_0(x, y)$ for (1.2) satisfies the bounds

$$T_0(x, y) = 1 - O(e^{\lambda x}) \quad \text{for } x < 0, \quad T_0(x, y) = O(e^{-\lambda x}) \quad \text{for } x > 0, \quad (1.6)$$

$$|\nabla T_0| = O(e^{-\lambda|x|}) \quad \text{for some } \lambda > 0. \quad (1.7)$$

We adopt fairly general assumptions on f , requiring only that $f(T)$ is not equal identically to zero, and

$$f(0) = f(1) = 0, \quad f(T) \geq 0 \quad \text{for } T \in (0, 1), \quad f \in C^1[0, 1]. \quad (1.8)$$

Two types of reaction rates $f(T)$ are distinguished in this class. The KPP-type reactions satisfy

$$f(0) = f(1) = 0, \quad f(T) > 0 \quad \text{for } T \in (0, 1). \quad (1.9)$$

An additional requirement $f'(0) = \max_{T \in [0, 1]} f(T)/T$ is often made. We do not make such requirement in this paper, and call the class described by (1.9) general KPP. Our interpretation of KPP includes an important Arrhenius-type non-linearity,

$$f(T) = C(1 - T)e^{-A/T},$$

that is believed to be an appropriate model for many chemical reactions in the context of reaction-diffusion models. We also consider the ignition non-linearities with

$$f(T) = 0 \quad \text{for } T \in [0, \theta_0] \quad \text{and} \quad T = 1, \quad f(T) > 0 \quad \text{for } T \in (\theta_0, 1). \quad (1.10)$$

By our assumptions on the nonlinearity (1.8), we can find $\theta_4 > \theta_1$, and $f_0, \zeta > 0$ such that

$$f(\theta) > f_0 \quad \text{for } \theta \in (\theta_1 - \zeta, \theta_4 + \zeta). \quad (1.11)$$

The values of the constants f_0, ζ and $\theta_{1,4}$ are the only information on the nonlinearity $f(T)$ that shows up in our bounds on the burning rate.

We assume that advection $u(x, y) \in C^1(\Omega)$ is time independent, has mean zero in the x -direction:

$$\int_0^H u_1(x, y) dy = 0 \quad (1.12)$$

and is incompressible:

$$\nabla \cdot u = 0. \quad (1.13)$$

The mathematical literature on the scalar reaction-diffusion equation (1.2) is enormous; far from giving an exhaustive overview, we mention several papers directly related to our work. First rigorous results about traveling waves for Eq. (1.2) go back to classical works of Kolmogorov, Petrovskii and Piskunov [23] and Fisher [13], which considered the case $u = 0$ in one dimension for the KPP nonlinearity. Recently Eq. (1.2) with $u \neq 0$, and in particular the effect of advection, became a subject of intense research. Berestycki and Nirenberg [6,7], and Berestycki, Larrouturou and Lions [4] initiated the studies of the existence of traveling waves for Eq. (1.2) of the form

$$T(x, y, t) = T(x - ct, y), \quad (1.14)$$

for shear flows of the form $u = (u(y), 0)$. Their stability was studied in [5,25,30], while in further works [3,31,32] stability and existence of traveling waves were established for the wider class of periodic flows. In this case, the traveling fronts have the form

$$T(x, y, t) = U(x - ct, x, y)$$

and are periodic in the last two variables. These and other results were recently reviewed in [33], and we refer the reader to this paper for a detailed exposition of the subject. Until very recently, there were no rigorous results on the physically interesting question of the speed of traveling waves. First such results have been established in [9] for percolating flows, and in [1] and [18] for the shear flows. Numerical studies of the propagation of fronts were performed for a shear flow in [21] with $Le \neq 1$, and for cellular flows in [22].

Another major direction of research has been homogenization approach. The homogenization regime $\kappa \rightarrow 0$, when the front width goes to zero, was extensively studied for KPP-type nonlinearity and for advection velocity that is periodic and varies either on the integral or diffusive scale by Freidlin [14–16]. Recently Majda and Souganidis derived an effective Hamilton–Jacobi equation in the limit $\kappa \rightarrow 0$ for the case of advection velocity varying on a small κ -dependent scale that is larger or comparable to that of the front width [24]. This effective equation is still difficult to analyze, and analytical predictions have been derived only for the shear flows. Numeric experiments exploring the results of [24] have been carried out in [10,11,26].

Very recently, Hamel [17] and Heinze, Stevens and Papanicolaou [18] proposed an elegant variational approach to the estimates of the speed of traveling waves in the presence of periodic advection. However, to the best of our knowledge nontrivial lower bounds using this method were obtained so far only for shear flows in the homogenization regime or for small advection, where they provide precise bounds for the small speed-up of the front [18].

The key question we wish to address in this paper is: what characteristics of the ambient fluid flow are responsible for burning rate enhancement? The question needs first to be made precise, because the reaction region may be complicated and, in general, may move with an ill-defined velocity, when traveling fronts do not exist. To measure the speed of burning in such situations, the bulk burning rate

$$V(t) = \int_{\Omega} T_t(x, y, t) \frac{dx dy}{H} \quad (1.15)$$

and its time average

$$\langle V \rangle_t = \frac{1}{t} \int_0^t V(s) ds$$

have been recently introduced in [9]. Note that for traveling fronts of the form (1.14) we have $V(t) = c$, but the notion of bulk burning rate makes sense in much more general situations when traveling fronts of the above form may not exist, and bulk burning rate serves as a natural generalization of the front speed. We have obtained in [9] lower bounds for $\langle V \rangle_t$ when $f(T)$ is a concave function of the KPP type. The

bounds are linear in the magnitude of the advecting velocity $u(x, y)$ provided that there exist tubes of streamlines that connect $x = -\infty$ and $x = +\infty$, satisfying some mild additional technical assumptions. We say then that the flow is percolating. In particular these bounds hold for shear flows of the form $(u(y), 0)$.

In this paper we consider much more general reaction rates $f(T)$ that are either of the ignition or general KPP type, and establish similar lower bounds for $V(t)$ for percolating flows that are periodic in space. The bound is linear in the magnitude of u and deteriorates as the scale of oscillations of u becomes comparable to the laminar front width $l = \kappa/v_0$. It is easy to show [9] that for any $u \in C^1$, the burning rate $\langle V \rangle_t$ satisfies linear in $\|u\|_\infty$ upper bound (for initial data as in (1.6) and (1.7)). Therefore, shear (and, more generally, percolating) flows are as effective as possible in speeding up combustion in terms of the power of $\|u\|_\infty$ in the large intensity regime. In particular, we establish the following lower bound for the bulk burning rate in a shear flow.

THEOREM 1. – *Let $T_0(x, y)$ be an arbitrary initial data satisfying (1.6) and (1.7), and let $T(x, y, t)$ satisfy (1.2) with either the Neumann (1.4) or periodic boundary conditions (1.5). Let also $u(x, y) = (u(y), 0)$ in (1.2). Then both for KPP and ignition non-linearities we have*

$$\lim_{t \rightarrow \infty} \langle V \rangle_t \geq C \left(v_0 + \sum_j \left(1 + \frac{l}{h_j} \right)^{-1} \int_{c_j - h_j}^{c_j + h_j} |u(y)| \frac{dy}{H} \right), \tag{1.16}$$

where the constant C depends only on the reaction function f and $l = \kappa/v_0$. Here the intervals $I_j = [c_j - h_j, c_j + h_j] \in (0, H)$ are any intervals such that

$$\frac{\|u\|_{\infty, j}}{2} \leq |u(y)| \leq \|u\|_{\infty, j}, \quad \|u\|_{\infty, j} = \sup_{I_j} |u(y)|. \tag{1.17}$$

We do not require $\bigcup_j I_j = [0, H]$.

The choice of intervals I_j is up to us, and should be made to maximize the lower bound. See Fig. 1 for an illustration.

As a corollary, the bound (1.16) holds for the speed c of a traveling front of the from (1.14). Our bound behaves correctly in the homogenization regime when $u(y)$ has the form $u(y) = \frac{A}{\varepsilon} v(y/\varepsilon)$ and provides a bound that is linear in the magnitude A of advection, in agreement with [9,18], where homogenization limit was studied. We also prove the analog of Theorem 1 for general percolating flows (see Theorem 5 in Section 3).

Another main result of this work concerns cellular flows with closed streamlines. Roughly speaking, in terms of their burning enhancement properties, such flows can be thought of as “the worst” class of flows, opposing “the best” percolating flows. One can expect the burning enhancement to be significantly weaker for cellular flows because of the numerous diffusive interfaces which prevent hot and cold regions from mixing fast. Cellular flows pose mathematically more challenging problem because of these diffusive interfaces; we will see that the estimates for percolating flows will form only a fraction

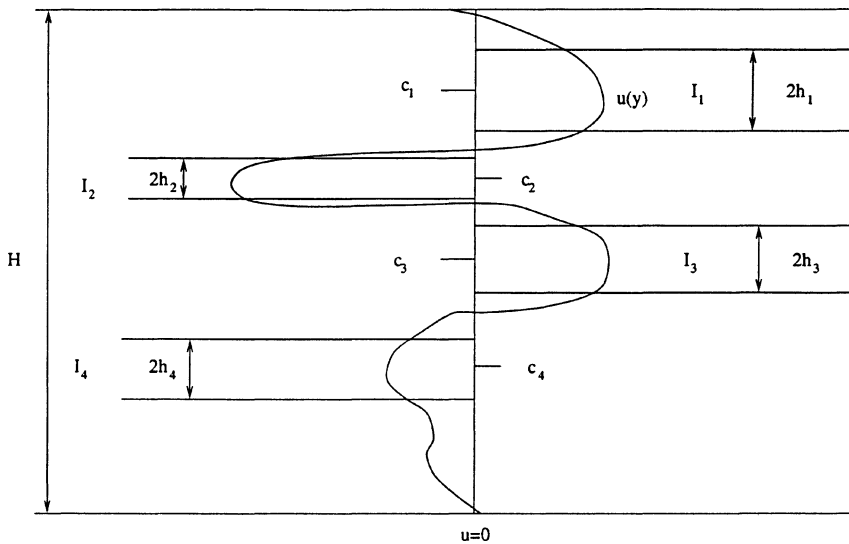


Fig. 1. The structure of the shear flow.

of the argument we will need in the cellular case. We consider a particular example of a cellular flow

$$u(x, y) = UH \left(\frac{\partial \psi}{\partial y}, -\frac{\partial \psi}{\partial x} \right), \quad \psi(x, y) = \sin\left(\frac{x}{H}\right) \sin\left(\frac{y}{H}\right). \tag{1.18}$$

See Fig. 2 for an illustration of streamlines in a single cell. Then under the assumptions of a large Peclet number and thin laminar front width:

$$Pe = \frac{UH}{\kappa} \geq 1, \quad \frac{l}{H} \leq 1, \quad l = \frac{\kappa}{v_0} \tag{1.19}$$

we get the following result.

THEOREM 2. – *Let $T_0(x, y)$ be an arbitrary initial data satisfying (1.6) and (1.7), and let $T(x, y, t)$ satisfy (1.2) with the either the Neumann (1.4) or periodic boundary conditions (1.5). Let also $u(x, y)$ in (1.2) be given by (1.18), and assume (1.19) is satisfied. Then both for KPP and ignition non-linearities we have*

$$\lim_{t \rightarrow \infty} \langle V \rangle_t \geq \begin{cases} \left(C_1 \sqrt{\frac{\tau_c}{\tau_u}} + C_2 \right) v_0, & \text{if } \tau_c \leq \tau_u, \\ \left(C_1 \left(\frac{\tau_c}{\tau_u} \right)^{1/5} + C_2 \right) v_0, & \text{if } \tau_c \geq \tau_u. \end{cases} \tag{1.20}$$

Here $\tau_c = \kappa/v_0^2$ is the chemical reaction time and $\tau_u = H/U$ is the turnover time. The constants in the inequalities depend only on the reaction f , more particularly on the constants f_0, ζ , and $\theta_4 - \theta_1$ that appear in (1.11).

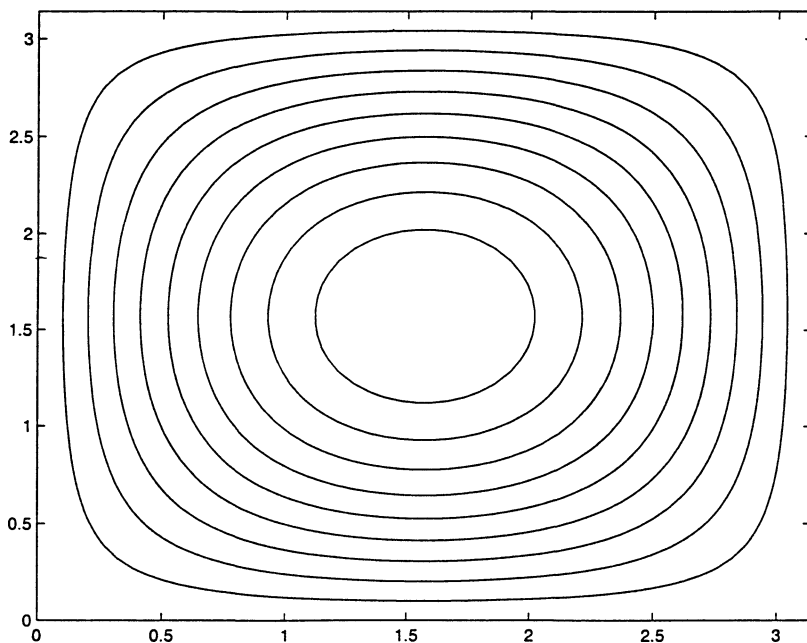


Fig. 2. Streamlines of a cellular flow ($H = \pi$).

To the best of our knowledge this is the first rigorous bound on the traveling front speed in a cellular flow. Note that the change of behavior of our bound depending on the ratio τ_c/τ_u is physically natural since for $\tau_u \ll \tau_c$ the front folds onto itself inside the period cell, which diminishes the affect of advection. The lower bound of Theorem 2 displays square root dependence on the flow intensity U until U reaches a critical value determined by a condition $\tau_c = \tau_u$. After that, the lower bound behaves like $U^{1/5}$. Recently, Audoly, Berestycki and Pomeau [1] gave an heuristic argument which proposes that the speed of the traveling front for cellular flows should scale as $U^{1/4}$ in the large U limit, which may indicate that our lower bound is not far off from the sharp bound.

One of the fundamental mathematical difficulties we deal with in this paper may be roughly described as follows. We will be able to bound the burning rate from below by integrals over the domain of reaction term $f(T)$ and of the square of the gradient $|\nabla T|^2$. It turns out that in order to obtain a lower bound on V in terms of u , it will be necessary to bound the integral of the higher derivative Laplacian term in terms of integrals of $f(T)$ and $|\nabla T|^2$. One can expect to do this using parabolic regularity, but the constants in such a priori estimates typically depend on u , and this dependence turns out to be too crude to get interesting results. We tackle this difficulty by taking advantage of the fact that what we need to estimate is the integral of Laplacian, not of the absolute value of Laplacian, and employ an appropriate averaging procedure to reduce derivatives. We hope that this idea will be useful in other related contexts in PDE estimates.

The paper is organized as follows. We prove Theorem 1 in Section 2, as well as some other results for shear flows. The analogous results for the percolating flows are proved in Section 3. We present our main results for the cellular flows, in particular implying

Theorem 2, in Section 4. Sections 6, 7 and 8 contain some intermediate estimates in the proof of Theorem 2. We put these estimates together to finish the proof in Section 9.

2. Shear flows and general nonlinearities

We first consider (1.2) in a shear, or unidirectional, flow $(u(y), 0)$, which is a particular example of a percolating flow. The proofs are somewhat less technical in this case and allow us to introduce some of the ideas used in the general case. Eq. (1.2) in a shear flow becomes

$$\begin{aligned} \frac{\partial T}{\partial t} + u(y) \frac{\partial T}{\partial x} &= \kappa \Delta T + \frac{v_0^2}{\kappa} f(T), \\ T(x, y, 0) &= T_0(x, y). \end{aligned} \tag{2.1}$$

The advection is assumed to be mean-zero:

$$\int_0^H u(y) \, dy = 0. \tag{2.2}$$

We impose an additional assumption

$$\frac{\partial T}{\partial t} \geq 0. \tag{2.3}$$

This condition is satisfied for all times provided that initially we have

$$\kappa \Delta T_0 - u(y) \frac{\partial T_0}{\partial x} + \frac{v_0^2}{\kappa} f(T_0) \geq 0, \tag{2.4}$$

as follows from the maximum principle (see, e.g., [28]). Therefore (2.3) is not a constraint on the dynamics but rather on the initial data. We note that (2.3) is true for traveling fronts of the form $T(x - ct, y)$ both for general KPP and ignition nonlinearity [4,7]. We assume the usual boundary conditions (1.3) at the left and right ends of the strip Ω and either Neumann (1.4) or periodic (1.5) boundary conditions at $y = 0, H$. We also require that the initial data $T_0(x, y)$ satisfies (1.6) and (1.7). These conditions are preserved by evolution (see e.g. [9]) if the advecting velocity $u(y) \in C^1[0, H]$, that is, we have for each $t > 0$:

$$\begin{aligned} 1 - T(x, y, t) &\leq C(t)e^{\lambda x} \quad \text{for } x < 0, & T(x, y, t) &\leq C(t)e^{\lambda x} \quad \text{for } x > 0, \\ |\nabla T(x, y, t)| &\leq C(t)e^{-\lambda|x|} \end{aligned} \tag{2.5}$$

provided that (1.6) and (1.7) hold initially.

Let $I_j = (c_j - h_j, c_j + h_j) \subset [0, H]$ be a collection of intervals satisfying (1.17). In particular $u(y)$ does not change sign on the intervals I_j . We do *not* require that $\bigcup_j I_j = [0, H]$. Then the bulk burning rate $V(t)$ defined by (1.15) obeys a lower bound described by the following theorem, which is the first main result of this section.

THEOREM 3. – *Let $T(x, y, t)$ be a solution of (2.1) with the boundary conditions (1.3) and either (1.4) or (1.5). Let the initial data $T_0(x, y)$ satisfy (2.4), (1.6) and (1.7). Furthermore, assume that $u(y) \in C^1(0, H)$ has mean zero (2.2) and the nonlinearity $f(T)$ satisfies (1.8). Then there exists a constant $C > 0$ that depends on $f(T)$ but not on $T_0(x, y)$ or $u(y)$, such that for any collection of intervals I_j that satisfies (1.17) we have*

$$V(t) \geq C \left(v_0 + \sum_j \left(1 + \frac{l}{h_j} \right)^{-1} \int_{c_j-h_j}^{c_j+h_j} |u(y)| \frac{dy}{H} \right) \tag{2.6}$$

with $l = \kappa/v_0$.

Remark 1. – The lower bound (2.6) does not deteriorate when oscillations in $u(y)$ become faster in space as long as its amplitude grows according to

$$\frac{\|u\|_{\infty,j}}{v_0} = O\left(\frac{l}{h_j}\right).$$

This agrees well with the homogenization limit $u_\varepsilon(y) = \frac{1}{\varepsilon}u(y/\varepsilon)$ considered in [9] and [18], that produces speed-up of the front of order $O(v_0)$. This is also an improvement of the analogous lower bound for $V(t)$ for the convex KPP case obtained in [9], where $(l/h_j)^2$ appeared in the factor.

2. The regularity assumption on $u(y)$ is used only to guarantee preservation of the boundary conditions (1.7) that allows us to integrate by parts in the proof. None of our bounds depend on the size of derivatives of $u(y)$.

It has been shown in [4,7] both in the case of ignition non-linearity (1.10), and for the general KPP nonlinearity (1.9) that there exist traveling front solutions of (2.1) of the form $T(x, y, t) = U(x - ct, y)$. The speed $c = c_*$ is uniquely determined by the nonlinearity $f(T)$ and advection $u(y)$ in the ignition case, while traveling front solutions exist for $c \geq c_u$ for some minimal speed c_u in the KPP case. The function $U(s, y)$ is monotonically decreasing in the variable $s = x - ct$ in both cases, so that (2.3) holds. Theorem 3 implies the following estimate on the speeds of the traveling fronts.

COROLLARY 1. – *Let $T(x - ct, y)$ be a traveling front solution of (2.1) with $f(T)$ being either of the ignition nonlinearity type (1.10), or of the KPP type (1.9). Then there exists a constant $C > 0$ that depends on the function f but not on $u(y)$ such that*

$$c \geq C \left(v_0 + \sum_j \left(1 + \frac{l}{h_j} \right)^{-1} \int_{c_j-h_j}^{c_j+h_j} |u(y)| \frac{dy}{H} \right). \tag{2.7}$$

Corollary 1 follows immediately from Theorem 3 since we have $V(t) = c$ for $T(x, y, t) = U(x - ct, y)$ due to the boundary conditions $U(s, y) \rightarrow 1$ as $s \rightarrow -\infty$, $U(s, y) \rightarrow 0$ as $s \rightarrow +\infty$. Corollary 1 and the stability results for traveling fronts [30, 32] imply Theorem 1 for general initial data. We prove now Theorem 1 assuming the result of Corollary 1.

Proof of Theorem 1. – Consider first ignition non-linearity. In this case we will show that

$$\lim_{t \rightarrow \infty} \langle V \rangle_t = c_*$$

where c_* is the unique speed of the traveling front. Then (1.16) will follow from (2.7). It was shown in [32] that for the initial data satisfying (1.6) (actually just tending to 1 and 0 at the two ends) there exist functions $\xi_{1,2}(t)$ such that

$$|\xi_i(t)| = o(t), \quad \text{as } t \rightarrow \infty,$$

and functions $q_i(t, x)$ that satisfy the linearized problem

$$\frac{\partial q_i}{\partial t} + u(y) \frac{\partial q_i}{\partial x} = \Delta q_i$$

such that

$$\begin{aligned} U(x - c_*t + \xi_1(t), y) - q_1(x, y, t) \\ \leq T(t, x, y) \leq U(x - c_*t - \xi_2(t), y) + q_2(x, y, t). \end{aligned} \tag{2.8}$$

Here $U(x - c_*t, y)$ is the traveling wave solution of (2.1). The initial data $q_i(x, y, 0)$ may be chosen in $L^1 \cap L^\infty(\Omega)$. Then we have for any $c > c_*$:

$$\begin{aligned} \langle V \rangle_\tau &= \frac{1}{\tau} \int_0^\tau dt \int_\Omega \frac{dx dy}{H} T_t dx dy = \frac{1}{\tau} \int_\Omega \frac{dx dy}{H} [T(x, y, \tau) - T_0(x, y)] \\ &= \frac{1}{\tau} \int_{-\infty}^0 dx \int_0^H \frac{dy}{H} [(1 - T_0) - (1 - T)] + \frac{1}{\tau} \int_0^{c\tau} dx \int_0^H \frac{dy}{H} [T(x, y, \tau) - T_0(x, y)] \\ &\quad + \frac{1}{\tau} \int_{c\tau}^\infty dx \int_0^H \frac{dy}{H} [T(x, y, \tau) - T_0(x, y)] \\ &\leq \frac{C}{\tau} + c + \frac{1}{\tau} \int_{(c-c_*)\tau}^\infty dx \int_0^H \frac{dy}{H} U(x - \xi_2(t), y) + \frac{1}{\tau} \int_{c\tau}^\infty dx \int_0^H \frac{dy}{H} q_2(x + c_*t, y, t) \\ &\leq \frac{C'}{\tau} + c \end{aligned}$$

and hence $\limsup_{\tau \rightarrow \infty} \langle V \rangle_\tau \leq c_*$. Similarly one may show that $\liminf_{\tau \rightarrow \infty} \langle V \rangle_\tau \geq c'$ for any $c' < c_*$, which shows that (1.16) holds.

In the KPP case, the estimates of the sort (2.8) are not yet available. However the bound (1.16) can be shown by reduction to the ignition non-linearity case. Indeed, given KPP type reaction f , consider ignition type reaction $f_\theta = \chi_\theta f \leq f$, say by cutting f off in a small neighborhood near zero for $T \leq \theta$. The constant C in (2.6) does not depend on θ for θ small enough as will be seen from the proof of Theorem 3. Let T and T_θ satisfy equations with reactions f and f_θ respectively with the same initial data $T_0(x, y)$. Then

$Z = T - T_\theta$ satisfies

$$Z_t + u \cdot \nabla Z - \kappa \Delta Z = \frac{v_0^2}{\kappa} (f(T) - f_\theta(T_\theta)) \geq \frac{v_0^2}{\kappa} (f(T) - f(T_\theta)).$$

It follows from the maximum principle that if $Z(x, 0) \geq 0$ then $Z(x, t) \geq 0$. Hence for the same initial data, the burning rate for the KPP reaction f is not smaller than for the ignition non-linearity f_θ :

$$\begin{aligned} \langle V[T] \rangle_t &= \frac{1}{\tau} \int \frac{dx dy}{H} [T(x, y, t) - T_0(x, y)] \\ &\geq \frac{1}{\tau} \int \frac{dx dy}{H} [T_\theta(x, y, t) - T_0(x, y)] = \langle V[T_\theta] \rangle_t. \end{aligned}$$

This implies the validity of the lower bound (1.16) in the KPP case. \square

We now turn to the proof of Theorem 3. The proof follows the general ideas of [9] with significant modifications required since f is not of concave KPP class. Our starting point is the following observation.

LEMMA 1. – *Under assumptions of Theorem 3 we have*

$$V(t) = \frac{v_0^2}{\kappa} \int_\Omega f(T(x, y, t)) \frac{dx dy}{H} \geq \kappa \int_\Omega |\nabla T(x, y, t)|^2 \frac{dx dy}{H}. \tag{2.9}$$

Proof. – Equality in (2.9) is obtained simply by integrating (2.1) over Ω using the boundary conditions (1.3) and (1.4) or (1.5), and mean-zero condition (2.2) on advection. To get the inequality we multiply (2.1) by T and integrate over Ω to get

$$\int_\Omega T T_t \frac{dx dy}{H} + \kappa \int_\Omega |\nabla T(x, y, t)|^2 \frac{dx dy}{H} = \frac{v_0^2}{\kappa} \int_\Omega T f(T) \frac{dx dy}{H} \leq V(t).$$

This implies (2.9) since $T_t \geq 0$ and $0 \leq T \leq 1$. \square

As a warm-up, we now prove a simple and general proposition, which already provides a glimpse of some of the ideas which we will use to obtain more sophisticated results. Namely, we show that for any divergence-free velocity $u(x, y)$ satisfying mild regularity conditions (it does *not* have to be a shear flow), and solution T satisfying (2.3), the burning rate is bounded below by Cv_0 .

PROPOSITION 1. – *Let $T(x, y, t)$ be a solution of (1.2) with the boundary conditions (1.3) and either (1.4) or (1.5). Assume that $u(x, y) \in C^1([0, H] \times \mathbb{R})$ satisfies (1.12) and (1.13), and that non-linearity $f(T)$ satisfies (1.8). Let the initial data $T_0(x, y)$ satisfy (2.4), (1.6) and (1.7). Then there exists a constant C , depending only on the parameters ζ and f_0 , such that*

$$V(t) \geq C(\zeta, f_0)v_0$$

with the constants ζ and f_0 defined in (1.11).

Proof. – The proof is similar to the proof of Lemma 2 in [9]. We can find y such that

$$\int_{\mathbb{R}} |\nabla T(x, y)|^2 dx \leq \frac{3}{H} \int_0^H \int_{\mathbb{R}} |\nabla T(x, y')|^2 dx dy',$$

and

$$\int_{\mathbb{R}} f(T(x, y)) dx \leq \frac{3}{H} \int_0^H \int_{\mathbb{R}} f(T(x, y')) dx dy'.$$

Then we can find $x_1 \leq x_2$ such that $T(x_1, y) = \theta_4 + \zeta$, $T(x_2, y) = \theta_1 - \zeta$, $T(x, y) \in [\theta_1 - \zeta, \theta_4 + \zeta]$ if $x_1 \leq x \leq x_2$ (see (1.11) for the definition of $\theta_{1,4}$). Then

$$\int_{\mathbb{R}} |\nabla T(x, y)|^2 dx \geq \frac{\theta_4 - \theta_1 + 2\zeta}{|x_2 - x_1|}$$

and

$$\int_{\mathbb{R}} f(T(x, y)) dx \geq f_0 |x_2 - x_1|.$$

Therefore we have

$$\sqrt{\int_{\mathbb{R}} \int_0^H |\nabla T|^2 dx dy \int_{\mathbb{R}} \int_0^H f(T) dx dy} \geq C f_0^{1/2} \zeta H.$$

Hence we obtain

$$\int_{\mathbb{R}} \int_0^H \left[\kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T) \right] \frac{dx dy}{H} \geq C f_0^{1/2} \zeta v_0.$$

Then Proposition 1 follows from Lemma 1. \square

We now return to the shear flows. To obtain more precise bounds involving advection velocity $u(y)$, we will bound from below in terms of $u(y)$ either the integral of $f(T)$ or the L^2 -norm of $|\nabla T|$, and use Lemma 1. The general plan in [9] was to integrate over all axis in x , obtaining an equation with an explicit term $u(y)$ in it. We were able to bound the rest of the terms from above by a combination of $\int f(T)$ and $\int |\nabla T|^2$ after averaging in y and t to control T_t and ΔT .

An additional twist we need here is to reduce our consideration to the region in space where the reaction actually takes place. In the case of ignition non-linearity, there is no reaction for sufficiently low temperatures. Similarly, for the Arrhenius type non-linearity, reaction is very weak near $T = 0$. On the technical side, restriction of consideration to some finite time dependent domain D with T in appropriate range will mandate additional averaging in x to control all terms by $\int f(T)$ and $\int |\nabla T|^2$. We will identify a

region D in x such that on one hand the temperature has a certain drop over this region and on the other for every $x \in D$ there is some $y \in I_j$ such that reaction is bounded away from zero at the point (x, y) . This will provide us with two alternatives for each $x \in D$: either reaction is uniformly bounded away from zero for that x or temperature drops by a certain amount on the interval $x \times I_j$. In the first case $\int_{I_j} f(T) dy$ will have to be large and in the second $\int_{I_j} |T_y|^2 dy$ will be bounded from below. Then we will integrate (2.1) over $x \in D$ at a fixed time t . That will relate $u(y)$ to some terms involving $V(t)$ and ΔT . We will additionally average both in x and y , which will bring ΔT into a form that can be bound by a combination of integrals of $f(T)$ and $|\nabla T|^2$. That will be possible since these have to be large on D as explained above. Finally we will use Lemma 1 to finish the proof.

In order to define the region D where much of the reaction takes place let us fix $\theta_4 > \theta_3 > \theta_2 > \theta_1$, where θ_4, θ_1 are as in (1.11). Let I_j be an interval on which (1.17) holds with $u(y) > 0$ (the case of I_j where $u(y) < 0$ is similar). We fix time $t > 0$ and choose two points x_0 and x_1 :

$$x_0 = \inf\{x: \text{for any } x' > x \text{ there exists } y \in I_j \text{ such that } T(x', y, t) \leq \theta_4\},$$

$$x_1 = \sup\{x: x > x_0 \text{ and for any } x' \in (x_0, x) \text{ there exists } y \in I_j$$

$$\text{such that } T(x', y, t) \geq \theta_1\}.$$

In other words, for any $x \in [x_0, x_1] = D$ there exists $y \in I_j$ such that $T(x, y, t) \in [\theta_1, \theta_4]$, and hence $f(T(x, y)) \geq f_0$. Note that x_0 is well-defined and finite since $T(x, y, t) \rightarrow 0, 1$ as $x \rightarrow \pm\infty$ uniformly in x because of (2.5). The definition of x_0 implies that

$$T(x_0, y) \geq \theta_4 \quad \text{for all } y \tag{2.10}$$

and thus x_1 is well-defined. Moreover,

$$T(x_1, y) \leq \theta_1 \quad \text{for all } y. \tag{2.11}$$

In preparation for multiple averaging in y that will be performed to control ΔT let us introduce the function $G(h, \xi)$:

$$G(h, \xi) = \begin{cases} 1 - \frac{|\xi|}{h}, & |\xi| \leq h, \\ 0, & |\xi| > h, \end{cases}$$

that corresponds to the following averaging in y :

$$\frac{1}{h_j} \int_0^{h_j} d\delta \int_{c_j-\delta}^{c_j+\delta} p(y) dy = \int_{c_j-h_j}^{c_j+h_j} G(h_j, y - c_j) p(y) dy \tag{2.12}$$

for a test function $p(y)$. The two integrations when applied to ΔT are required to get rid of derivatives of T . Observe that the function $G(h, \xi)$ has the following properties

$$0 \leq G(h, \xi) \leq 1, \quad G(h, \xi) \geq \frac{1}{2} \quad \text{for } \xi \in \left[-\frac{h}{2}, \frac{h}{2}\right]. \tag{2.13}$$

We note that (2.10) and (2.11) imply that at the two ends of the interval $[x_0, x_1]$ we have

$$\int_{c_j-h_j}^{c_j+h_j} dy G(h_j, y - c_j)u(y)T(x_0, y) \geq \theta_4 F_j,$$

$$\int_{c_j-h_j}^{c_j+h_j} dy G(h_j, y - c_j)u(y)T(x_1, y) \leq \theta_1 F_j$$

with

$$F_j = \int_{c_j-h_j}^{c_j+h_j} dy G(h_j, y - c_j)u(y).$$

In preparation for averaging in x , we choose η_0 and η_1 so that

$$\eta_0 = \inf_{\xi} \left\{ \xi > 0: \int_{c_j-h_j}^{c_j+h_j} dy G(h_j, y - c_j)u(y)T(x_0 + \xi, y) = \theta_3 F_j \right\},$$

$$\eta_1 = \inf_{\xi} \left\{ \xi > 0: \int_{c_j-h_j}^{c_j+h_j} dy G(h_j, y - c_j)u(y)T(x_1 - \xi, y) = \theta_2 F_j \right\}.$$

We remark that $x_0 < x_0 + \eta_0 < x_1 - \eta_1 < x_1$. Now we are ready to average (2.1). Given $\alpha \in (0, \eta_0)$ and $\beta \in (0, \eta_1)$ we integrate (2.1) in $x \in (x_0 + \alpha, x_1 - \beta)$ and in y according to (2.12):

$$\begin{aligned} & \int_{x_0+\alpha}^{x_1-\beta} dx \int_{c_j-h_j}^{c_j+h_j} dy G(h_j, y - c_j)T_t - \kappa \int_{x_0+\alpha}^{x_1-\beta} dx \int_{c_j-h_j}^{c_j+h_j} dy G(h_j, y - c_j)T_{yy} \\ & + \kappa \int_{c_j-h_j}^{c_j+h_j} dy G(h_j, y - c_j)[T_x(x_0 + \alpha, y) - T_x(x_1 - \beta, y)] \\ & \geq \int_{c_j-h_j}^{c_j+h_j} dy G(h_j, y - c_j)u(y)[T(x_0 + \alpha, y) - T(x_1 - \beta, y)]. \end{aligned} \tag{2.14}$$

We dropped the integral of $f(T)$ on the right side which resulted in the inequality in (2.14). The reason that our averagings in x and y are different is that while the width h_j is a prescribed quantity, we have no a priori control over η_0 and η_1 . Therefore our bounds may not involve them, and we employ different estimates when averaging in x . First we estimate the integral of T_{yy} on the left side of (2.14).

LEMMA 2. – *There exists a universal constant $C > 0$ such that the following estimate holds for every $x \in [x_0, x_1]$*

$$\begin{aligned} & \left| \kappa \int_{c_j-h_j}^{c_j+h_j} dy G(h_j, y - c_j) T_{yy}(x, y) \right| \\ & \leq C f_0^{-1/2} \zeta^{-1} \frac{\kappa}{v_0 h_j} \left[\frac{v_0^2}{\kappa} \int_{c_j-h_j}^{c_j+h_j} dy f(T(x, y)) + \kappa \int_{c_j-h_j}^{c_j+h_j} dy |\nabla T|^2(x, y) \right]. \end{aligned} \tag{2.15}$$

Proof. – We use (2.12) to rewrite the left side of (2.15) for a fixed $x \in [x_0, x_1]$ as

$$\begin{aligned} & \left| \int_{c_j-h_j}^{c_j+h_j} dy G(h_j, y - c_j) T_{yy} \right| \\ & = \frac{1}{h_j} |T(c_j + h_j) - 2T(c_j) + T(c_j - h_j)| \leq \frac{2}{h_j} \delta_j[T](x) \end{aligned} \tag{2.16}$$

with $\delta_j[T](x) = \sup_{y \in I_j} T(x, y) - \inf_{y \in I_j} T(x, y)$. Note that because of our choice of x_0 and x_1 , given any $x \in (x_0, x_1)$, we may find y' such that $T(x, y') \in [\theta_1, \theta_4]$. Then we may find y_1, y_2 such that for any $y \in [y_1, y_2]$ we have $T(x, y) \in (\theta_1 - \zeta, \theta_4 + \zeta)$, and, moreover,

$$|T(x, y_2) - T(x, y_1)| = \min(\zeta, \delta_j[T](x)). \tag{2.17}$$

Then (1.11) implies that

$$\int_{c_j-h_j}^{c_j+h_j} f(T(x, y)) dy \geq f_0 |y_2 - y_1|.$$

Applying the Cauchy–Schwartz inequality we also obtain

$$\int_{c_j-h_j}^{c_j+h_j} |\nabla T(x, y)|^2 dy \geq \frac{|T(x, y_2) - T(x, y_1)|^2}{|y_2 - y_1|}.$$

Multiplying these two inequalities we obtain

$$\begin{aligned} & \sqrt{\int_{c_j-h_j}^{c_j+h_j} f(T(x, y)) dy \int_{c_j-h_j}^{c_j+h_j} |\nabla T(x, y)|^2 dy} \\ & \geq \sqrt{f_0} |T(x, y_2) - T(x, y_1)| \geq \frac{f_0^{1/2} \zeta}{4} |T(c_j + h_j) - 2T(c_j) + T(c_j - h_j)| \end{aligned}$$

because of (2.16) and (2.17), and since $\zeta < 1/2$. Then (2.15) follows. \square

Furthermore, because of our choice of η_0, η_1 , we have for any $\alpha \in [0, \eta_0]$ and $\beta \in (0, \eta_1)$

$$\int_{c_j-h_j}^{c_j+h_j} dy G(h_j, y - c_j)u(y)[T(x_0 + \alpha, y) - T(x_1 - \beta, y)] \geq (\theta_3 - \theta_2)F_j. \tag{2.18}$$

We use (2.15), (2.18) and positivity of T_t to rewrite (2.14) as

$$\begin{aligned} C \int_{x_0+\alpha}^{x_1-\beta} dx \int_{c_j-h_j}^{c_j+h_j} dy \left[T_t + \frac{\kappa}{v_0 h_j} \left[\kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T(x, y)) \right] \right] \\ + \kappa \int_{c_j-h_j}^{c_j+h_j} dy G(h_j, y - c_j) [T_x(x_0 + \alpha, y) - T_x(x_1 - \beta, y)] \geq (\theta_3 - \theta_2)F_j. \end{aligned} \tag{2.19}$$

In order to deal with the integral term on the second line that involves T_x we average (2.19) in $\alpha \in (0, \eta_0)$ and $\beta \in (0, \eta_1)$:

$$\frac{1}{\eta_0 \eta_1} \int_0^{\eta_0} d\alpha \int_0^{\eta_1} d\beta$$

to get

$$\begin{aligned} C \int_{x_0}^{x_1} dx \int_{c_j-h_j}^{c_j+h_j} dy \left[T_t + \frac{\kappa}{v_0 h_j} \left[\kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T(x, y)) \right] \right] \\ + \frac{\kappa}{\eta_0} \int_{c_j-h_j}^{c_j+h_j} dy G(h_j, y - c_j) [T(x_0 + \eta_0, y) - T(x_0, y)] \\ + \frac{\kappa}{\eta_1} \int_{c_j-h_j}^{c_j+h_j} dy G(h_j, y - c_j) [T(x_1 - \eta_1, y) - T(x_1, y)] \geq (\theta_3 - \theta_2)F_j. \end{aligned} \tag{2.20}$$

We bound now the term involving η_0 in (2.20) as follows.

LEMMA 3. – *There exists a universal constant $C > 0$ such that*

$$\begin{aligned} \left| \frac{\kappa}{\eta_0} \int_{c_j-h_j}^{c_j+h_j} dy G(h_j, y - c_j) [T(x_0 + \eta_0, y) - T(x_0, y)] \right| \\ \leq C \kappa (\theta_4 - \theta_3)^{-2} \int_{c_j-h_j}^{c_j+h_j} dy \int_{x_0}^{x_0+\eta_0} dx |\nabla T|^2. \end{aligned} \tag{2.21}$$

Proof. – The proof of this estimate is based on two observations. First, we have

$$\left| \frac{1}{\eta_0} \int_{c_j-h_j}^{c_j+h_j} dy G(h_j, y - c_j) [T(x_0 + \eta_0, y) - T(x_0, y)] \right| \leq \frac{2h_j}{\eta_0}$$

because of (2.13). Second, we have

$$\int_{c_j-h_j}^{c_j+h_j} dy \int_{x_0}^{x_0+\eta_0} dx |\nabla T|^2 \geq C(\theta_4 - \theta_3)^2 \frac{h_j}{\eta_0}. \tag{2.22}$$

This bound is established as follows. Recall that because of our choice of η_0 we have

$$\int_{c_j-h_j}^{c_j+h_j} dy u(y) G(h_j, y - c_j) [T(x_0, y) - T(x_0 + \eta_0, y)] \geq (\theta_4 - \theta_3) F_j. \tag{2.23}$$

Furthermore, recall that $\|u\|_{\infty,j}/2 \leq |u(y)| \leq \|u\|_{\infty,j}$ on the interval $(c_j - h_j, c_j + h_j)$ and thus (2.23) implies that

$$\int_{c_j-h_j}^{c_j+h_j} dy G(h_j, y - c_j) |T(x_0, y) - T(x_0 + \eta_0, y)| \geq \frac{(\theta_4 - \theta_3) F_j}{\|u\|_{\infty,j}} \geq C(\theta_4 - \theta_3) h_j.$$

Then we obtain using the Cauchy–Schwartz inequality:

$$\begin{aligned} C(\theta_4 - \theta_3) h_j &\leq \left(\int_{c_j-h_j}^{c_j+h_j} dy G^2(h_j, y - c_j) \right)^{1/2} \\ &\quad \times \left(\int_{c_j-h_j}^{c_j+h_j} dy |T(x_0, y) - T(x_0 + \eta_0, y)|^2 \right)^{1/2} \\ &\leq Ch_j^{1/2} \left(\int_{c_j-h_j}^{c_j+h_j} dy \left| \int_{x_0}^{x_0+\eta_0} dx T_x(x, y) \right|^2 \right)^{1/2} \\ &\leq Ch_j^{1/2} \left(\eta_0 \int_{c_j-h_j}^{c_j+h_j} dy \int_{x_0}^{x_0+\eta_0} dx T_x^2(x, y) \right)^{1/2} \end{aligned}$$

and (2.22) follows. \square

A bound similar to (2.21) holds for the integral involving η_1 in (2.20). We use these two estimates in (2.20) to get

$$\int_{x_0}^{x_1} dx \int_{c_j-h_j}^{c_j+h_j} dy \left[T_t + \frac{\kappa}{v_0 h_j} \left[\kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T(x, y)) \right] \right] + \kappa \int_{c_j-h_j}^{c_j+h_j} dy \int_{x_0}^{x_1} dx |\nabla T|^2$$

$$\geq C F_j \geq C' \int_{c_j-h_j}^{c_j+h_j} dy |u(y)|. \tag{2.24}$$

A similar estimate holds also for the intervals I_j , on which $u(y) < 0$. The only difference would be that at the first step of obtaining the analog of (2.14) one has to drop the integral involving T_t and not that of $f(T)$. The rest of the estimates still hold. We use Lemma 1 in (2.24) to get after summation over all intervals I_j :

$$V(t) \geq C \sum_j \left(1 + \frac{l}{h_j} \right)^{-1} \int_{c_j-h_j}^{c_j+h_j} |u(y)| \frac{dy}{H},$$

with $l = \kappa/v_0$. Finally, we can always add v_0 to the right hand side by Proposition 1. This finishes the proof of Theorem 3.

3. Percolating flows

We now consider equation

$$T_t + u(x, y) \cdot \nabla T = \kappa \Delta T + \frac{v_0^2}{\kappa} f(T), \tag{3.1}$$

$$T(x, y, 0) = T_0(x, y),$$

in a more general class of flows, which we call “percolating”. By this we mean that there exist tubes of streamlines of the advecting velocity $u(x, y)$, which connect $x = -\infty$ and $x = +\infty$ in either direction, as depicted on Fig. 3. We assume that the flow has zero mean (1.12) and hence such tubes of streamlines will go in both directions. More precisely, let us assume that there exist regions D_j^+ and D_j^- , $j = 1, \dots, N$, such that each of them is bounded by the streamlines of $u(x, y)$, and the projection of each streamline of $u(x, y)$, contained in either D_j^+ or D_j^- , onto the x -axis covers the whole real line (these projections need not be one-to-one, however). We denote by D_{\pm} the union of all D_j^{\pm} respectively.

We will further assume that the velocity $u(x, y)$ is periodic in space. Then it is known [3,31,32] that for ignition nonlinearity (1.10) there exist periodic traveling fronts. They have the form $T(x - ct, x, y)$ and are periodic in the last two variables and monotonically decreasing in the first one. These solutions satisfy our main condition

$$\frac{\partial T}{\partial t}(x, y, t) \geq 0. \tag{3.2}$$

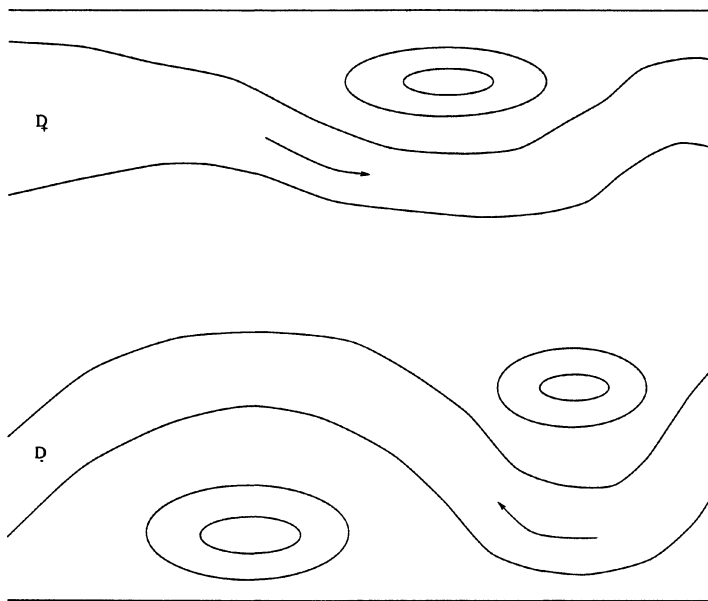


Fig. 3. Streamlines of $u(x, y)$.

Our results may be generalized in a straightforward manner to non-periodic percolating flows as long as initial data satisfies (3.2):

$$\kappa \Delta T_0 + \frac{v_0^2}{\kappa} f(T_0) - u \cdot \nabla T_0 \geq 0. \tag{3.3}$$

However, we restrict our attention to periodic $u(x, y)$ to simplify the presentation.

We assume that the streamlines in D_j^\pm are sufficiently regular, so that inside each D_j^\pm there exists a one-to-one C^2 change of coordinates $(x, y) \rightarrow (\rho, \xi)$, such that ρ is constant on the streamlines, while ξ is an orthogonal coordinate for ρ (with a slight abuse of notation we shall use the same notation (ρ, ξ) in all D_j^\pm , although these coordinates may not be defined globally). Moreover, $u \cdot \nabla \xi > 0$ in D_j^+ , while $u \cdot \nabla \xi < 0$ in each D_j^- . The variable ρ varies in the interval $[c_j^\pm - h_j^\pm, c_j^\pm + h_j^\pm]$, while ξ varies in $(-\infty, \infty)$ in the set D_j^\pm . See Fig. 4 for a sketch of coordinates (ρ, ξ) . The square of the length element inside each set D_j^\pm is given by

$$dx^2 + dy^2 = E_1^2(\rho, \xi) d\rho^2 + E_2^2(\rho, \xi) d\xi^2.$$

We assume that the functions $E_{1,2}$ are bounded from below:

$$C^{-1} \leq E_{1,2}(\rho, \xi) \tag{3.4}$$

uniformly on all D_j^\pm . Moreover, the function

$$\omega(\rho, \xi) = \frac{E_2(\rho, \xi)}{E_1(\rho, \xi)} \tag{3.5}$$

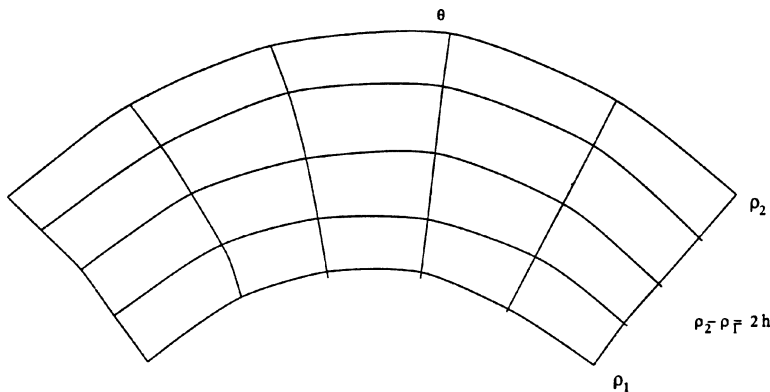


Fig. 4. Curvilinear coordinates (ρ, ξ) .

satisfies the following bounds:

$$C^{-1} \leq |\omega(\rho, \xi)| \leq C, \quad \left| \frac{\partial \omega}{\partial \xi}(\rho, \xi) \right|, \quad \left| \frac{\partial \omega}{\partial \rho}(\rho, \xi) \right| \leq \frac{C}{h_j^\pm} \quad \text{on } D_j^\pm, \text{ respectively,} \tag{3.6}$$

with $2h_j^\pm$ being the absolute value of the difference of the values of ρ on the two components of the boundary ∂D_j^\pm (recall that D_j^\pm are bounded by two streamlines of $u(x, y)$). Finally we assume that the flux density $E_1 u$ does not oscillate too much on the set D_j^\pm :

$$\begin{aligned} \frac{\|E_1 u\|_{\infty, j}}{2} &\leq E_1(\rho, \theta)|u(\rho, \theta)| \leq \|E_1 u\|_{\infty, j} \quad \text{for } (x, y) \in D_j^\pm, \\ \|E_1 u\|_{\infty, j} &= \sup_{(\rho, \xi) \in D_j^\pm} |E_1(\rho, \xi)u(\rho, \xi)|. \end{aligned} \tag{3.7}$$

Note that $E_1(\rho, \xi)|u(\rho, \xi)$ is independent of ξ . In particular if

$$u(x, y) = UH\nabla^\perp \Psi = UH \left(\frac{\partial \Psi}{\partial y}, -\frac{\Psi}{\partial x} \right)$$

with $|\nabla \Psi| \leq C/H$ we may choose $\rho = H\Psi(x, y)$ so that $E_1 = \frac{1}{H|\nabla \Psi|}$. Then we have $E_1|u| = U$, so that (3.7) holds automatically and (3.4) also holds for E_1 . Other conditions on the streamlines may be also easily restated in terms of the stream function $\Psi(x, y)$.

We do not make any assumptions on the behavior of the streamlines of $u(x, y)$ outside the regions D_+ and D_- . In particular, there may be pockets of still fluid, streamlines may be closed, etc. (see Fig. 3).

Then we have the following theorem.

THEOREM 4. – *Let $T(x, y, t)$ be a solution of (3.1) with the boundary conditions (1.3) and (1.4) or (1.5), with the initial data $T_0(x, y)$ satisfying (3.3), and nonlinearity $f(T)$ satisfying (1.8). Let each of the sets D_j^\pm be of the form $D_j^\pm = \{\rho \in [c_j - h_j,$*

$c_j + h_j\}$. Then under the assumptions (3.4) and (3.6) on the streamlines of the flow $u(x, y) \in C^1(\Omega)$, we have

$$V(t) \geq C \left(v_0 + \sum_{D_j^\pm} \left(1 + \frac{l}{h_j} \right)^{-1} \int_{c_j-h_j}^{c_j+h_j} |u(\rho, \xi)| E_1(\rho, \xi) \frac{d\rho}{H} \right) \tag{3.8}$$

for all $t > 0$. Here $l = \kappa/v_0$ and the constant C in (3.8) depends only on the function $f(T)$ and the constants appearing in (3.4) and (3.6).

Note that the integrals on the right side of (3.8) give fluxes of $u(x, y)$ through the tubes of the streamlines. As in the shear case the pre-factor $(1 + l/h_j)^{-1}$ agrees with the homogenization limit [9,18].

Recall that traveling fronts for periodic flows have the form

$$T(x, y, t) = U(x - ct, x, y) \tag{3.9}$$

with the function $U(s, x, y)$ being periodic in the last two variables. It was shown in [3,31,32] that in the ignition nonlinearity case (1.10) such traveling fronts exist and their speed c_* is unique. Their existence for the KPP nonlinearities (1.9) was shown recently in [3] with $c \geq c_u$, c_u being the minimal traveling front speed. The following analog of Corollary 1 holds for percolating flows, which we formulate separately for the convenience of the reader.

COROLLARY 2. – Let $f(T)$ be either of the ignition nonlinearity type (1.10), or of the KPP type (1.9). Let also $U(x - ct, x, y)$ be a traveling wave-type solution of (3.1), periodic in the second two variables. Then there exists a constant $C > 0$ that depends only on the function f and on the constants appearing in (3.4) and (3.6) such that

$$c \geq C \left(v_0 + \sum_j \left(1 + \frac{l}{h_j} \right)^{-1} \int_{c_j-h_j}^{c_j+h_j} |u(\rho, \xi)| E_1(\rho, \xi) \frac{d\rho}{H} \right).$$

Proof. – Corollary 2 follows from Theorem 4 as follows. Let $U(x - ct, x, y)$ be a periodic traveling front solution of (3.1) such that

$$U(s, x + L, y) = U(s, x, y)$$

and let $\tau = L/c$. Then we have

$$\begin{aligned} \frac{1}{\tau} \int_0^\tau V(t) dt &= \frac{1}{\tau} \int_0^\tau dt \int_\Omega (-cU_s(x - ct, x, y)) \frac{dx dy}{H} \\ &= \frac{1}{\tau} \int_0^L dt' \int_\Omega [-U_s(x - t', x, y)] \frac{dx dy}{H} \end{aligned}$$

$$\begin{aligned}
 &= -\frac{c}{L} \int_0^L dt' \int_{\Omega} \left[\frac{d}{dx} U(x-t', x, y) - U_x(x-t', x, y) \right] \frac{dx dy}{H} \\
 &= c + \frac{c}{L} \int_0^L dt' \int_{\Omega} U_x(x-t', x, y) \frac{dx dy}{H} \\
 &= c + \frac{c}{L} \int_{\Omega} \frac{dx dy}{H} [U(x, x+L, y) - U(x, x, y)] = c. \quad \square
 \end{aligned}$$

Remark. – We note that Corollary 2 implies a lower bound on the effective diffusivity [2] in the homogenization regime. Recall that solutions of the advection-diffusion equation (3.1) with $f(T) = 0$, and with advection of the form $u(x, y) = \frac{U}{\varepsilon} v(\frac{x}{\varepsilon}, \frac{y}{\varepsilon})$ with $v(x, y)$ periodic, converge as $\varepsilon \rightarrow 0$ to the solution \bar{T} of the homogenized problem

$$\frac{\partial \bar{T}}{\partial t} = \kappa_{ij}^* \frac{\partial^2 \bar{T}}{\partial x_i \partial x_j}, \quad \bar{T}(x, y, 0) = T_0(x, y), \quad (x_1, x_2) = (x, y).$$

The effective diffusivity k^* is a complicated functional of advection $Uv(\mathbf{y})$. Explicit bounds on κ^* in terms of the magnitude U of advection are easy to obtain in the shear case, when κ^* may be found explicitly, and effective diffusivity in the direction of the flow $\kappa_{xx}^* \sim U^2$. Using results of [18] one may deduce from Corollary 2 that this bound applies also to periodic percolating flows, despite the fact that no explicit expression for κ^* is known in this case.

Corollary 2 and the stability results of [32] imply the analog of Theorem 1.

THEOREM 5. – *Let the initial data $T_0(x, y)$ for Eq. (3.1) satisfy the decay to 0, 1 conditions (1.6) and (1.7). Then both for KPP and ignition non-linearities we have*

$$\lim_{t \rightarrow \infty} \langle V \rangle_t \geq C \left(v_0 + \sum_j \left(1 + \frac{l}{h_j} \right)^{-1} \int_{c_j-h_j}^{c_j+h_j} |u(\rho, \xi)| E_1(\rho, \xi) \frac{d\rho}{H} \right),$$

where constant C depends only on the non-linearity f and on the constants appearing in (3.4) and (3.6).

Now we turn to the proof of Theorem 4. The proof is a modification of the proof of Theorem 3. We will again utilize Lemma 1 as well as averaging along the streamlines of $u(x, y)$ in order to bound the arising averages of ΔT in terms of integrals of $f(T)$ and $|\nabla T|^2$. The additional technical difficulties are due to the fact that two natural geometries of the problem – streamlines for the advective term and Euclidean coordinates for Laplacian – are in harmony in the case of shear flows, but at odds in the case of more general percolating flows. Moreover, while in the case of shear flows we gave the proof that we felt was simplest, here we will use the approach which is slightly more involved; however, it is better adapted for the application to cellular flows in the following sections.

Let us consider a region $D_j^+ = \{(\rho, \xi) : \rho \in [c_j - h_j, c_j + h_j]\}$ with $u \cdot \nabla \xi > 0$. Introduce notation $k_j(\rho) = G(h_j, \rho - c_j) E_1(\rho, \xi) |u(\rho, \xi)|$ (k_j does not depend on ξ

by incompressibility of $u(x, y)$ and, similarly to the shear case,

$$F_j = \int_{c_j-h_j}^{c_j+h_j} k_j(\rho) \, d\rho.$$

We can find $\xi_1 > \xi_0$ such that

$$\int_{c_j-h_j}^{c_j+h_j} k_j(\rho)T(\rho, \xi_0) \, d\rho = \theta_4 F_j, \quad \int_{c_j-h_j}^{c_j+h_j} k_j(\rho)T(\rho, \xi_1) \, d\rho = \theta_1 F_j,$$

and for every $\xi \in [\xi_0, \xi_1]$ we have

$$\theta_1 F_j \leq \int_{c_j-h_j}^{c_j+h_j} k_j(\rho)T(\rho, \xi) \, d\rho \leq \theta_4 F_j.$$

Let us denote by \tilde{D}_j^+ the region bounded by the curves $\rho = c_j \pm h_j$ and $\xi = \xi_0, \xi_1$. This region depends on time, but we will suppress this dependence in notation. Theorem 4 will follow from the following

THEOREM 6. – *Let $T(x, y, t)$ be a solution of (3.1) with the boundary conditions (1.3) and (1.4) or (1.5), with the initial data $T_0(x, y)$ satisfying (3.3), and nonlinearity $f(T)$ satisfying (1.8). Then under the assumptions (3.4) and (3.6) on the streamlines of the flow $u(x, y) \in C^1(\Omega)$, we have for every time t*

$$\int_{\tilde{D}_j^+} \left(T_t + \kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T) \right) \, dx \, dy \geq C(\zeta, f_0) \left(1 + \frac{l}{h} \right)^{-1} (\theta_4 - \theta_1)^3 F_j$$

with the constants ζ, f_0 and $\theta_{1,4}$ defined by (1.11).

Remark. – A similar lower bound on the integral over D_j^+ is easier to obtain, and also suffices to prove Theorem 4. We chose, however, to formulate Theorem 6 in this stronger version since this is what we will need when dealing with cellular flows.

Proof. – Let $\theta_3 = \theta_4 - (\theta_4 - \theta_1)/3$, and $\theta_2 = \theta_1 + (\theta_4 - \theta_1)/3$. Then we may choose η_0 and η_1 similarly to the shear case, namely

$$\eta_0 = \inf_{\eta} \left\{ \eta > 0: \int_{c_j-h_j}^{c_j+h_j} d\rho k_j(\rho)T(\rho, \xi_0 + \eta) = \theta_3 F_j \right\},$$

$$\eta_1 = \inf_{\eta} \left\{ \eta > 0: \int_{c_j-h_j}^{c_j+h_j} d\rho k_j(\rho)T(\rho, \xi_1 - \eta) = \theta_2 F_j \right\}.$$

We choose $\alpha \in (0, \eta_0)$ and $\beta \in (0, \eta_1)$, integrate (3.1) over $\xi \in (\eta_0 + \alpha, \eta_1 - \beta)$ and average in ρ with the kernel G to get

$$\begin{aligned}
 & \int_{\xi_0+\alpha}^{\xi_1-\beta} d\xi \int_{c_j-h_j}^{c_j+h_j} d\rho G(h_j, \rho - c_j) E_1 E_2 T_t \\
 & - \kappa \int_{\xi_0+\alpha}^{\xi_1-\beta} d\xi \int_{c_j-h_j}^{c_j+h_j} d\rho G(h_j, \rho - c_j) E_1 E_2 [T_{xx} + T_{yy}] \\
 & \geq \int_{c_j-h_j}^{c_j+h_j} k_j(\rho) [T(\rho, \xi_0 + \alpha) - T(\rho, \xi_1 - \beta)] d\rho \\
 & \geq \frac{1}{3}(\theta_4 - \theta_1) F_j.
 \end{aligned} \tag{3.10}$$

In (3.10), we dropped the term involving $f(T)$ on the right-hand side, as we did in the shear case. We now look at the term involving the Laplacian:

$$\begin{aligned}
 & \int_{\xi_0+\alpha}^{\xi_1-\beta} d\xi \int_{c_j-h_j}^{c_j+h_j} d\rho G(h_j, \rho - c_j) E_1(\rho, \xi) E_2(\rho, \xi) [T_{xx}(\rho, \xi) + T_{yy}(\rho, \xi)] \\
 & = \frac{1}{h_j} \int_0^{h_j} d\delta \int_{\xi_0+\alpha}^{\xi_1-\beta} d\xi \int_{c_j-\delta}^{c_j+\delta} d\rho E_1(\rho, \xi) E_2(\rho, \xi) [T_{xx}(\rho, \xi) + T_{yy}(\rho, \xi)].
 \end{aligned}$$

Let us denote $D_{\delta\alpha\beta}$ the region bounded by coordinate curves $\rho = c_j \pm \delta$ and $\xi = \xi_0 + \alpha, \xi = \xi_1 - \beta$. Using Green’s formula, we rewrite the last two integrations for fixed δ as

$$\begin{aligned}
 & \int_{\xi_0+\alpha}^{\xi_1-\beta} d\xi \int_{c_j-\delta}^{c_j+\delta} d\rho E_1(\rho, \xi) E_2(\rho, \xi) [T_{xx}(\rho, \xi) + T_{yy}(\rho, \xi)] \\
 & = \iint_{D_{\delta\alpha\beta}} \Delta T \, dx \, dy = \int_{\partial D_{\delta\alpha\beta}} \frac{\partial T}{\partial n} \, ds \\
 & = \int_{\xi_0+\alpha}^{\xi_1-\beta} d\xi \left[\omega(c_j + \delta, \xi) \frac{\partial T}{\partial \rho}(c_j + \delta, \xi) - \omega(c_j - \delta, \xi) \frac{\partial T}{\partial \rho}(c_j - \delta, \xi) \right] \\
 & \quad + \int_{c_j-\delta}^{c_j+\delta} d\rho \left[\omega^{-1}(\rho, \xi_1 - \beta) \frac{\partial T}{\partial \xi}(\rho, \xi_1 - \beta) - \omega^{-1}(\rho, \xi_0 + \alpha) \frac{\partial T}{\partial \xi}(\rho, \xi_0 + \alpha) \right].
 \end{aligned} \tag{3.11}$$

We used the definition (3.5) of the function $\omega(\rho, \xi) = E_2(\rho, \xi)/E_1(\rho, \xi)$ in the last step. The average of the term on the first line in (3.11) is estimated by the following lemma, an analog of Lemma 2.

LEMMA 4. – *There exists a constant $C > 0$ such that we have for all $\xi \in [\xi_0, \xi_1]$*

$$\begin{aligned} & \left| \frac{\kappa}{h_j} \int_0^{h_j} d\delta \left[\omega(c_j + \delta, \xi) \frac{\partial T}{\partial \rho}(c_j + \delta, \xi) - \omega(c_j - \delta, \xi) \frac{\partial T}{\partial \rho}(c_j - \delta, \xi) \right] \right| \\ & \leq C f_0^{-1/2} \zeta^{-1} \frac{\kappa}{v_0 h_j} \left[\frac{v_0^2}{\kappa} \int_{c_j - h_j}^{c_j + h_j} d\rho E_1 E_2 f(T) + \kappa \int_{c_j - h_j}^{c_j + h_j} d\rho E_1 E_2 |\nabla T|^2 \right], \end{aligned} \quad (3.12)$$

where the constant C depends only on constants in the bounds (3.6) and (3.4).

Proof. – We will show that

$$\begin{aligned} & \left| \int_0^{h_j} d\delta \omega(c_j + \delta, \xi) \frac{\partial T}{\partial \rho}(c_j + \delta, \xi) \right| \\ & \leq \frac{C f_0^{-1/2} \zeta^{-1}}{v_0} \left[\kappa \int_{c_j}^{c_j + h_j} d\rho T_\rho^2(\rho, \xi) + \frac{v_0^2}{\kappa} \int_{c_j}^{c_j + h_j} d\rho f(T(\rho, \xi)) \right] \end{aligned} \quad (3.13)$$

for all $\xi \in [\xi_0, \xi_1]$. A similar estimate holds for the second term on the left side of (3.12). By definition of ξ_0 and ξ_1 for every $\xi \in [\xi_0, \xi_1]$ there exists $\rho_0 \in (c_j - h_j, c_j + h_j)$ such that $T(\rho_0, \xi) \in [\theta_1, \theta_4]$. Then given $\xi \in [\xi_0, \xi_1]$ we have two possibilities. First, assume that $T \in (\theta_1 - \zeta, \theta_4 + \zeta)$ for all $\rho \in (c_j - h_j, c_j + h_j)$. Then we have for such ξ

$$\int_{c_j}^{c_j + h_j} d\rho f(T(\rho, \xi)) \geq C f_0 \int_{c_j}^{c_j + h_j} d\rho \omega^2(\rho, \xi),$$

which implies that

$$\begin{aligned} & \left| \int_0^{h_j} d\delta \omega(c_j + \delta, \xi) \frac{\partial T}{\partial \rho}(c_j + \delta, \xi) \right| \\ & \leq \left(\int_{c_j}^{c_j + h_j} d\rho \omega^2(\rho, \xi) \right)^{1/2} \left(\int_{c_j}^{c_j + h_j} d\rho T_\rho^2(\rho, \xi) \right)^{1/2} \\ & \leq C f_0^{-1/2} \left(\int_{c_j}^{c_j + h_j} d\rho f(T(\rho, \xi)) \right)^{1/2} \left(\int_{c_j}^{c_j + h_j} d\rho (T_\rho^2(\rho, \xi)) \right)^{1/2} \\ & \leq \frac{C f_0^{-1/2}}{v_0} \left[\kappa \int_{c_j}^{c_j + h_j} d\rho T_\rho^2(\rho, \xi) + \frac{v_0^2}{\kappa} \int_{c_j}^{c_j + h_j} d\rho f(T(\rho, \xi)) \right]. \end{aligned}$$

The other case for a given ξ is that the temperature $T(\rho, \xi)$ drops out of the range $(\theta_1 - \zeta, \theta_4 + \zeta)$ for some ρ . Then we may find $\rho' \in (c_j - h, c_j + h_j)$ such that

$T(\rho', \xi) = \theta_1 - \zeta$ or $T(\rho', \xi) = \theta_4 + \zeta$, and, moreover, $T \in (\theta_1 - \zeta, \theta_4 + \zeta)$ for all ρ between ρ' and ρ_0 . Then we have $|T(\rho', \xi) - T(\rho_0, \xi)| \geq \zeta$ and hence

$$\begin{aligned} & \left(\int_{c_j}^{c_j+h_j} d\rho f(T(\rho, \xi)) \right)^{1/2} \left(\int_{c_j}^{c_j+h_j} d\rho T_\rho^2(\rho, \xi) \right)^{1/2} \\ & \geq \left(\frac{\zeta^2}{|\rho' - \rho_0|} f_0 |\rho' - \rho_0| \right)^{1/2} \geq \zeta f_0^{1/2}. \end{aligned}$$

Then the estimate (3.13) also holds in that case since

$$\left| \int_0^{h_j} d\delta \omega(c_j + \delta, \xi) \frac{\partial T}{\partial \rho}(c_j + \delta, \xi) \right| \leq C$$

for all ξ , as can be seen from integrating by parts in ρ and using (3.6). Since $\zeta \leq 1/2$ (3.13) holds in both cases. \square

In order to bring the term in the second line of (3.11) into a form convenient for analysis we average (3.11) in α and β . Let us consider an estimate on the second summand after averaging in α over $[0, \eta_0]$; the other summand is treated similarly.

LEMMA 5. – *There exists a constant C, depending only on constants in bounds (3.4) and (3.6), such that*

$$\begin{aligned} & \left| \frac{\kappa}{\eta_0 h_j} \int_0^{h_j} d\delta \int_0^{\eta_0} d\alpha \int_{c_j-\delta}^{c_j+\delta} d\rho \omega^{-1}(\rho, \xi_0 + \alpha) \frac{\partial T}{\partial \xi}(\rho, \xi_0 + \alpha) \right| \\ & \leq C \left[f_0^{-1/2} (\theta_4 - \theta_1)^{-1} \min((\theta_4 - \theta_1), \zeta)^{-1} \frac{\kappa}{v_0 h_j} \right. \\ & \quad \times \int_{\tilde{D}_j^+} dx dy \left[\frac{v_0^2}{\kappa} f(T(x, y)) + \kappa |\nabla T(x, y)|^2 \right] \\ & \quad \left. + (\theta_4 - \theta_1)^{-2} \kappa \int_{\tilde{D}_j^+} dx dy |\nabla T(x, y)|^2 \right]. \end{aligned} \tag{3.14}$$

Proof. – We have to estimate the following expression

$$\begin{aligned} & \frac{1}{\eta_0} \int_0^{h_j} d\delta \int_0^{\eta_0} d\alpha \int_{c_j-\delta}^{c_j+\delta} d\rho \omega^{-1}(\rho, \xi_0 + \alpha) \frac{\partial T}{\partial \xi}(\rho, \xi_0 + \alpha) \\ & = \frac{1}{\eta_0} \int_0^{h_j} d\delta \int_{c_j-\delta}^{c_j+\delta} d\rho [\omega^{-1}(\rho, \xi_0 + \eta_0) T(\rho, \xi_0 + \eta_0) - \omega^{-1}(\rho, \xi_0) T(\rho, \xi_0)] \end{aligned}$$

$$-\frac{1}{\eta_0} \int_0^{h_j} d\delta \int_0^{\eta_0} d\alpha \int_{c_j-\delta}^{c_j+\delta} d\rho \frac{\partial \omega^{-1}}{\partial \xi}(\rho, \xi_0 + \alpha) T(\rho, \xi_0 + \alpha). \tag{3.15}$$

The first term in (3.15) is evidently bounded by

$$\frac{1}{\eta_0} \left| \int_0^{h_j} d\delta \int_{c_j-\delta}^{c_j+\delta} d\rho [\omega^{-1}(\rho, \xi_0 + \eta_0) T(\rho, \xi_0 + \eta_0) - \omega^{-1}(\rho, \xi_0) T(\rho, \xi_0)] \right| \leq \frac{Ch_j^2}{\eta_0}. \tag{3.16}$$

Furthermore, we claim that

$$\int_{\tilde{D}_j^+} dx dy |\nabla T(x, y)|^2 \geq \frac{C(\theta_4 - \theta_3)^2 h_j}{\eta_0}. \tag{3.17}$$

This is shown exactly as the estimate (2.22) in the proof of Lemma 3 for the shear case, given the assumption (3.6) on ω . We combine (3.16) and (3.17) to obtain

$$\begin{aligned} & \frac{1}{\eta_0} \left| \int_0^{h_j} d\delta \int_{c_j-\delta}^{c_j+\delta} d\rho [\omega^{-1}(\rho, \xi_0 + \eta_0) T(\rho, \xi_0 + \eta_0) - \omega^{-1}(\rho, \xi_0) T(\rho, \xi_0)] \right| \\ & \leq C(\theta_4 - \theta_3)^{-2} h_j \int_{\tilde{D}_j^+} dx dy |\nabla T(x, y)|^2. \end{aligned} \tag{3.18}$$

Next we estimate the second term in (3.15):

$$\frac{1}{\eta_0} \left| \int_0^{h_j} d\delta \int_{\xi_0}^{\xi_0+\eta_0} d\xi \int_{c_j-\delta}^{c_j+\delta} d\rho \frac{\partial \omega^{-1}}{\partial \xi}(\rho, \xi) T(\rho, \xi) \right| \leq Ch_j \tag{3.19}$$

because of (3.6). Notice that if $\eta_0 \leq h_j$, then Lemma 5 follows directly from (3.17). Hence we can assume $\eta_0 > h_j$. The following final lemma allows us to finish the proof of Lemma 5.

LEMMA 6. – Assume that $\eta_0 > h_j$. Then there exists a constant C , which depends only on the constants in bounds (3.6) and (3.4), such that

$$\int_{\tilde{D}_j^+} f(T) dx dy \int_{\tilde{D}_j^+} |\nabla T|^2 dx dy \geq Cf_0(\theta_4 - \theta_1)^2 (\min((\theta_4 - \theta_1), \zeta/2))^2 h_j^2.$$

Remark. – This lemma is much easier to prove with D_j^+ instead of \tilde{D}_j^+ , basically the argument of Proposition 1 applies. The simpler version is also sufficient for the proof of Theorem 4, but we need this stronger version for the proof of Theorem 6.

Proof. – Let us denote $|S|$ the Lebesgue measure of a measurable set S . We know that

$$\int_{c_j-h_j}^{c_j+h_j} k_j(\rho)(T(\rho, \xi_0) - T(\rho, \xi_1)) \, d\rho = (\theta_4 - \theta_1)F_j.$$

Consider two sets

$$S_1 = \{\rho \mid T(\rho, \xi_0) - T(\rho, \xi_1) < (\theta_4 - \theta_1)/2\}, \quad S_2 = [c_j - h_j, c_j + h_j] \setminus S_1.$$

Then

$$\int_{S_1} k_j(\rho)(T(\rho, \xi_0) - T(\rho, \xi_1)) \, d\rho \leq (\theta_4 - \theta_1)F_j/2,$$

and hence

$$\int_{S_2} k_j(\rho)(T(\rho, \xi_0) - T(\rho, \xi_1)) \, d\rho \geq (\theta_4 - \theta_1)F_j/2.$$

Since $T(\rho, \xi_0) - T(\rho, \xi_1) \leq 1$, and $k_j(\rho)/F_j \leq 2h_j^{-1}$ by the properties of G and (3.7) we must have $|S_2| \geq (\theta_4 - \theta_1)h_j/4$. Choose $\rho_0 \in S_2$ such that

$$\int_{\xi_0}^{\xi_1} d\xi f(T(\rho_0, \xi)) \leq \frac{3}{|S_2|} \int_{\tilde{D}_j^+} f(T) \, dx \, dy$$

and

$$\int_{\xi_0}^{\xi_1} d\xi T_\xi^2(\rho_0, \xi) \leq \frac{3}{|S_2|} \int_{\tilde{D}_j^+} T_\xi^2 \, d\rho \, d\xi \leq \frac{C}{|S_2|} \int_{\tilde{D}_j^+} |\nabla T|^2 \, dx \, dy,$$

with C depending only on the constants in (3.6). Since $\rho_0 \in S_2$, we have $T(\rho_0, \xi_0) - T(\rho_0, \xi_1) \geq (\theta_4 - \theta_1)/2$. Assume first that there exists $\xi \in [\xi_0, \xi_1]$ where $T(\rho_0, \xi) \in [\theta_1 - \zeta/2, \theta_4 + \zeta/2]$. Then we can find $\xi_0 \leq \xi_2 \leq \xi_3 \leq \xi_1$ such that for every $\xi \in [\xi_2, \xi_3]$, $T(\rho_0, \xi) \in [\theta_1 - \zeta, \theta_4 + \zeta]$, and

$$T(\rho_0, \xi_2) - T(\rho_0, \xi_3) \geq \min((\theta_4 - \theta_1)/2, \zeta/2).$$

Therefore,

$$\int_{\xi_0}^{\xi_1} f(T) \, d\xi \geq f_0(\xi_3 - \xi_2),$$

while

$$\int_{\xi_0}^{\xi_1} T_\xi^2 \, d\xi \geq \frac{(\min((\theta_4 - \theta_1)/2, \zeta/2))^2}{\xi_3 - \xi_2}.$$

Combining these estimates and the definition of ρ_0 , we find

$$\int_{\tilde{D}_j^+} f(T) \, dx \, dy \int_{\tilde{D}_j^+} |\nabla T|^2 \, dx \, dy \geq C f_0 (\min((\theta_4 - \theta_1)/2, \zeta/2))^2 |S_2|^2,$$

which proves the lemma in this case.

The other case we have to consider is that for every $\xi \in [\xi_0, \xi_1]$, $T(\rho_0, \xi) \notin [\theta_1 - \zeta/2, \theta_4 + \zeta/2]$. Then we will be able to find a point $\tilde{\xi} \in [\xi_0, \xi_1]$ so that there is a drop in temperature along the curve $\xi = \text{const}$. Assume $T(\rho_0, \xi) > \theta_4 + \zeta/2$ for all ξ , the other case being similar. By mean value theorem, we also have that for every $\xi \in [\xi_0, \xi_1]$ there exists ρ_1 such that $T(\rho_1, \xi) \in [\theta_1, \theta_4]$, and so $T(\rho_1, \xi) \leq \theta_4$. Similarly to the above, we can find $\tilde{\xi}$ such that

$$\int_{c_j-h_j}^{c_j+h_j} d\rho f(T(\rho, \tilde{\xi})) \leq \frac{3}{\xi_1 - \xi_0} \int_{\tilde{D}_j^+} f(T) \, dx \, dy \leq \frac{3}{\eta_0} \int_{\tilde{D}_j^+} f(T) \, dx \, dy$$

and

$$\int_{c_j-h_j}^{c_j+h_j} d\rho T_\rho^2(\rho, \tilde{\xi}) \leq \frac{3}{\xi_1 - \xi_0} \int_{\tilde{D}_j^+} T_\rho^2 \, d\rho \, d\xi \leq \frac{3}{\eta_0} \int_{\tilde{D}_j^+} T_\rho^2 \, d\rho \, d\xi \leq \frac{C}{\eta_0} \int_{\tilde{D}_j^+} |\nabla T|^2 \, dx \, dy.$$

An argument identical to the one we used in the previous case establishes that

$$\int_{c_j-h_j}^{c_j+h_j} f(T) \, d\rho \geq f_0(\rho_1 - \rho_2),$$

while

$$\int_{c_j-h_j}^{c_j+h_j} T_\rho^2 \, d\rho \geq \frac{\zeta^2}{4(\rho_1 - \rho_2)}$$

for some $c_j + h_j \geq \rho_1 > \rho_2 \geq c_j - h_j$. This implies that

$$\int_{\tilde{D}_j^+} f(T) \, dx \, dy \int_{\tilde{D}_j^+} |\nabla T|^2 \, dx \, dy \geq C f_0 \zeta^2 \eta_0^2 \geq C f_0 \zeta^2 h_j^2.$$

Thus Lemma 6 is proven. \square

Lemma 6 and the assumptions (3.4) and (3.6) imply that

$$\int_{\tilde{D}_j^+} dx \, dy \left[\frac{v_0}{\kappa} f(T) + \frac{\kappa}{v_0} |\nabla T|^2 \right] \geq C f_0^{1/2} (\theta_4 - \theta_1) \min((\theta_4 - \theta_1)/2, \zeta/2) h_j.$$

Therefore we deduce from (3.19) that

$$\begin{aligned} & \frac{1}{\eta_0 h_j} \left| \int_0^{h_j} d\delta \int_{\xi_0}^{\xi_0 + \eta_0} d\xi \int_{c_j - \delta}^{c_j + \delta} d\rho \frac{\partial \omega^{-1}}{\partial \xi}(\rho, \xi) T(\rho, \xi) \right| \\ & \leq C f_0^{-1/2} (\theta_4 - \theta_1)^{-1} \min((\theta_4 - \theta_1)/2, \zeta/2)^{-1} \frac{1}{v_0 h_j} \\ & \quad \times \int_{\tilde{D}_j^+} dx dy \left[\frac{v_0^2}{\kappa} f(T) + \kappa |\nabla T|^2 \right]. \end{aligned} \tag{3.20}$$

Then (3.15), (3.18) and (3.20) imply Lemma 5. \square

Averaging of (3.11) in $\beta \in [0, b_1]$ produces terms similar to the left side of (3.14), which are bounded by the same quantity. Now we put together our estimates on \tilde{D}_j^+ , that is, Eqs. (3.10) and (3.11), and Lemmas 4 and 5:

$$\begin{aligned} & \int_{\tilde{D}_j^+} dx dy G(h_j, \rho - c_j) T_t + \zeta^{-1} f_0^{-1/2} \frac{\kappa}{v_0 h_j} \int_{\tilde{D}_j^+} dx dy \left[\frac{v_0^2}{\kappa} f(T) + \kappa |\nabla T|^2 \right] \\ & + C f_0^{-1/2} (\theta_4 - \theta_1)^{-1} \min((\theta_4 - \theta_1), \zeta)^{-1} \frac{\kappa}{v_0 h_j} \int_{\tilde{D}_j^+} dx dy \left[\frac{v_0^2}{\kappa} f(T) + \kappa |\nabla T|^2 \right] \\ & + C (\theta_4 - \theta_1)^{-2} \kappa \int_{\tilde{D}_j^+} dx dy |\nabla T|^2 \geq C (\theta_4 - \theta_1) F_j. \end{aligned}$$

Therefore we obtain

$$\begin{aligned} & \left(1 + \frac{\kappa}{v_0 h_j} \right) \int_{\tilde{D}_j^+} dx dy \left[T_t + \frac{v_0^2}{\kappa} f(T) + \kappa |\nabla T|^2 \right] \geq C(\zeta, f_0) (\theta_4 - \theta_1)^3 F_j \\ & \geq C(\zeta, f_0) (\theta_4 - \theta_1)^3 \int_{c_j - h_j}^{c_j + h_j} E_1(\rho, \xi) |u(\rho, \xi)| d\xi, \end{aligned}$$

which proves Theorem 6. \square

The estimate on the regions D_j^- with $u \cdot \nabla \xi < 0$ is similar. The only essential difference is that in inequality (3.10) we drop the term involving T_t but keep the one with $f(T)$, which does not make any difference in the final result. Then Theorem 4 follows after summation over all D_j^\pm from Lemma 1 and Proposition 1. \square

4. Cellular flows: The main result

Now we consider (1.2) in a cellular flow:

$$T_t + u \cdot \nabla T = \kappa \Delta T + \frac{v_0^2}{\kappa} f(T), \tag{4.1}$$

that is, flow with closed streamlines, and establish a lower bound for the burning rate. For simplicity, we limit our consideration to one typical representative class of cellular flows, given by the stream function

$$\psi(x, y) = UH \sin \frac{x}{H} \sin \frac{y}{H} \tag{4.2}$$

on the strip $(-\infty, \infty) \times [0, \pi H]$ (for convenience from now on H will be the width of the strip divided by π). The flow $u(x, y)$ is given by

$$u(x, y) = U \nabla^\perp \psi(x, y) = U \left(\sin \frac{x}{H} \cos \frac{y}{H}, -\cos \frac{x}{H} \sin \frac{y}{H} \right). \tag{4.3}$$

The streamlines inside a period cell are depicted on Fig. 2. The results we prove can be extended in a direct way to the periodic cellular flows of more general form.

We will further assume that the Peclet number is larger than one:

$$\text{Pe} = \frac{UH}{\kappa} \geq 1 \tag{4.4}$$

and the size of the cell is larger than the laminar front width:

$$\frac{l}{H} \leq 1, \quad l = \frac{\kappa}{v_0}. \tag{4.5}$$

Conditions (4.4) and (4.5) are natural for flows of large amplitude and for thin fronts. Moreover, our results may be easily adapted to the other regimes, where (4.4) and (4.5) are violated. We introduce also the turnover time τ_u , and the chemical reaction time τ_c :

$$\tau_u = \frac{H}{U}, \quad \tau_c = \frac{\kappa}{v_0^2}. \tag{4.6}$$

It turns out that the ratio τ_u/τ_c is the crucial parameter for burning in the cellular flows.

Finally we assume that $T(x, y, t)$ satisfies the usual boundary conditions and that

$$\frac{\partial T}{\partial t}(x, y, t) \geq 0.$$

As we noted previously, this condition is satisfied as long as it holds initially.

THEOREM 7. – *Let $T(x, y, t)$ be a solution of (2.1) with the boundary conditions (1.3) and either (1.4) or (1.5), and the cellular flow given by (4.3). Let the initial data $T_0(x, y)$ satisfy (2.4), (1.6) and (1.7), and let the non-linearity $f(T)$ be of either ignition or general KPP type. Furthermore, assume that (4.4) and (4.5) hold. Then we have for any time t*

$$V(t) \geq \begin{cases} (C_1 \sqrt{\frac{\tau_c}{\tau_u}} + C_2) v_0, & \text{if } \tau_c \leq \tau_u, \\ (C_1 (\frac{\tau_c}{\tau_u})^{1/5} + C_2) v_0, & \text{if } \tau_c \geq \tau_u. \end{cases} \tag{4.7}$$

The constants in the inequalities depend only on the reaction f , more particularly on constants f_0 , ζ , and $\theta_4 - \theta_1$ that appear in (1.11).

Remark. – As we noted above, in order to avoid excessive details, we chose not to formulate Theorem 7 in the exhaustive form which goes through all possible relationships between parameters (large κ limit, small H limit, small v_0 limit). The reader will find it not difficult to extend the results we prove to the above mentioned regimes. Theorem 7 is formulated here for the range of parameters that appears to be physically reasonable for most problems of interest.

Furthermore, we have the following corollary.

COROLLARY 3. – *Let $f(T)$ be of ignition nonlinearity type (1.10), or of the KPP type (1.9) and let c be the speed of a traveling wave-type solution $T(x, y, t) = U(x - ct, x, y)$ of (4.1), periodic in the second two variables. Then there exist constants $C_{1,2} > 0$ which depend only on the function f and on the constants appearing in (3.4) and (3.6) such that*

$$c \geq \begin{cases} \left(C_1 \sqrt{\frac{\tau_c}{\tau_u}} + C_2 \right) v_0, & \text{if } \tau_c \leq \tau_u, \\ \left(C_1 \left(\frac{\tau_c}{\tau_u} \right)^{1/5} + C_2 \right) v_0, & \text{if } \tau_c \geq \tau_u. \end{cases}$$

Corollary 3 follows from Theorem 7 since the traveling front profile $U(s, x, y)$ is monotonically decreasing in s (see [31] for the ignition case, and [3] for KPP). Then Theorem 2 follows immediately from Corollary 3, results of [31] and the argument we gave in the proof of Theorem 1.

The proof of Theorem 7 is a boundary layer argument that proceeds, roughly, as follows. The temperature drops from one on the left to zero on the right. We will watch the temperature in the layers of width h formed by streamlines near the boundary of the cells. The drop of temperature in these layers may occur inside the cells or over the diffusive interfaces. The first estimate, which we call advective, shows how much the cell must contribute to the bulk burning rate if a certain drop of the temperature (in the range $[\theta_1, \theta_4]$) takes place along the streamlines inside the cell. It is reasonable to expect that the drop over the cell will be small when advection is strong since it mixes the fluid inside the cell quickly: in an analytic form this intuition will translate into a large lower bound for the burning rate if the temperature drop is significant. The second estimate, which we call diffusive, gives a lower bound for the burning rate given certain drop of the temperature between the two cells. We do expect the temperature to drop on the boundaries, and hence the lower bound is only effective if we choose h in an appropriate way, sufficiently small. Finally, we prove the reaction estimate, which takes into account the total area of the region over which the temperature drops. These estimates will be brought together to establish the lower bound for the bulk burning rate using an appropriate optimization argument.

5. Cellular flows: regularity of the streamlines

Our first objective is to define appropriate curvilinear coordinates on the cells, and to show that these coordinates satisfy certain technical assumptions that we will need. The

natural choice of the coordinate ρ , which is constant on the streamlines, is

$$\rho(x, y) = \frac{\psi(x, y)}{U} = H \sin \frac{x}{H} \sin \frac{y}{H}. \quad (5.1)$$

We have certain freedom in the definition of the orthogonal coordinate ξ along the streamlines:

$$\nabla \xi = Q \nabla^\perp \rho, \quad (5.2)$$

where Q is some function which should satisfy

$$\nabla \rho \cdot \nabla Q = -Q \Delta \rho. \quad (5.3)$$

It is easy to compute that

$$\partial_\rho = x_\rho \partial_x + y_\rho \partial_y = \frac{\xi_y}{J} \partial_x - \frac{\xi_x}{J} \partial_y,$$

where $J = \rho_x \xi_y - \rho_y \xi_x = -Q |\nabla \rho|^2$. Hence

$$\partial_\rho = \frac{1}{|\nabla \rho|^2} \nabla \rho \cdot \nabla,$$

and so we have from (5.3)

$$\frac{\partial Q}{\partial \rho} = -\frac{Q \Delta \rho}{|\nabla \rho|^2}. \quad (5.4)$$

We will choose Q so that $Q(H/2, \xi) = 1$; Eq. (5.4) then allows us to define Q in the region $H > \rho > 0$:

$$Q(\rho, \xi) = e^{-\int_{H/2}^{\rho} \frac{\Delta \rho(h, \xi)}{|\nabla \rho(h, \xi)|^2} dh}. \quad (5.5)$$

We have the following auxiliary

LEMMA 7. – *In the region $H/2 \geq \rho > 0$ we have the following bound for the function Q :*

$$0 < e^{-1} \leq Q(\rho, \xi) \leq e.$$

Proof. – Consider formula (5.5). We have

$$\Delta \rho = -\frac{2\pi^2}{H^2} \rho(x, y),$$

and

$$\begin{aligned} |\nabla \rho|^2 &= \left(\cos \frac{x}{H} \sin \frac{y}{H} \right)^2 + \left(\sin \frac{x}{H} \cos \frac{y}{H} \right)^2 \\ &= \left(\sin \frac{y}{H} \right)^2 + \left(\sin \frac{x}{H} \right)^2 - \frac{2\rho^2}{H^2} \geq 2\frac{\rho}{H} \left(1 - \frac{\rho}{H} \right) \geq \frac{\rho}{H} \end{aligned} \quad (5.6)$$

in the region $\rho \leq H/2$. Hence in the region $H/2 \geq \rho > 0$.

$$\frac{|\Delta\rho|}{|\nabla\rho|^2} \leq 2/H.$$

Therefore, by (5.5), we have $e^{-1} \leq Q \leq e$ in this region. \square

Recall our notation

$$dx^2 + dy^2 = E_1^2 d\rho^2 + E_2^2 d\xi^2, \quad \omega = \frac{E_2}{E_1}.$$

The next proposition summarizes some of the properties of the coordinates (ρ, ξ) in a region of interest to us.

PROPOSITION 2. – *For the cellular flow defined by (4.3) and coordinates ρ, ξ defined by (5.1), (5.2), and (5.5), the following bounds hold in the region $H/2 \geq \rho > 0$:*

$$E_{1,2}(\rho, \xi) \geq C, \tag{5.7}$$

$$0 < C^{-1} \geq \omega(\rho, \xi) \leq C, \tag{5.8}$$

$$\left| \frac{\partial\omega}{\partial\rho}(\rho, \xi) \right| \leq CH^{-1}, \tag{5.9}$$

$$\left| \frac{\partial\omega}{\partial\xi}(\rho, \xi) \right| \leq CH^{-1} |\log(\rho/H)|.$$

Proof. – Direct computation gives that $E_1 = 1/|\nabla\rho|$, $E_2 = 1/Q|\nabla\rho|$. Then Lemma 7 and the fact that $|\nabla\rho| \leq 1$ imply (5.7). It follows from the definition of ω that $\omega = 1/Q$, and hence Lemma 7 implies (5.9). Next,

$$\left| \frac{\partial\omega}{\partial\rho} \right| = \frac{1}{Q} \frac{|\Delta\rho|}{|\nabla\rho|^2} \leq \frac{2e}{H},$$

proving (5.10). Finally,

$$\left| \frac{\partial\omega}{\partial\xi} \right| = \frac{2}{QH^2} \left| \int_{H/2}^{\rho} h \partial_{\xi} \left(\frac{1}{|\nabla\rho|^2} \right) dh \right|.$$

Notice that

$$\partial_{\xi} = x_{\xi} \partial_x + y_{\xi} \partial_y = \frac{\rho_y}{Q|\nabla\rho|^2} \partial_x - \frac{\rho_x}{Q|\nabla\rho|^2} \partial_y.$$

A straightforward computation using (5.5) and (5.6) leads to

$$\left| \frac{\partial\omega}{\partial\xi} \right| \leq \frac{C}{H} \left| \int_{H/2}^{\rho} \frac{dh}{h} \right| \leq CH^{-1} |\log(\rho/H)|. \quad \square$$

6. Cellular flows: Advective estimate

Let us introduce some notation. Within the cell, we will normalize ξ by letting it be zero in the negative direction of the x axis (assuming that the origin has been placed in the center of the cell). We will denote by L the value of ξ in the positive direction of the x axis. In every cell, we will consider a tube of streamlines bounded by $\rho = h$ and $\rho = 3h$; h will be always assumed to be less than $H/6$. We set

$$k(\rho) = G(h, \rho - 2h)E_1(\rho, \xi)|u(\rho, \xi)|.$$

The fact that $k(\rho)$ does not depend on ξ is a direct corollary of incompressibility of the flow. Moreover, with our definition of ρ for the cellular flow, we have $k(\rho) = UG(h, \rho - 2h)$. We also denote

$$F = \int_h^{3h} k(\rho) \, d\rho.$$

As a corollary of Proposition 2, in the strip $h \leq \rho \leq 3h$ we have all conditions on $E_{1,2}$ and ω that have been necessary for the percolating flow estimates. In particular, we have

$$\left| \frac{\partial \omega}{\partial \xi} \right| \leq CH^{-1} |\log(\rho/H)| \leq Ch^{-1}, \tag{6.1}$$

since $h \leq \rho \leq H$. We first state an estimate very similar to Theorem 6.

THEOREM 8. – *Assume that within one cell C , there exist two values ξ_0, ξ_1 such that for some $s_0, s_1 \in [\theta_1, \theta_4]$, $s_0 > s_1$, we have*

$$\int_h^{3h} k(\rho)T(\rho, \xi_0) \, d\rho = s_0F, \quad \int_h^{3h} k(\rho)T(\rho, \xi_1) \, d\rho = s_1F,$$

$$s_1F \leq \int_h^{3h} k(\rho)T(\rho, \xi) \, d\rho \leq s_0F \quad \text{for } \xi \in [\xi_0, \xi_1].$$

Let D be the region bounded by the curves $\rho = h$, $\rho = 3h$, $\xi = \xi_0$ and $\xi = \xi_1$. Then

$$\int_D \left(T_t + \kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T) \right) \, dx \, dy \geq C(\zeta, f_0) \left(1 + \frac{l}{h} \right)^{-1} (s_0 - s_1)^3 F. \tag{6.2}$$

The constant C in (6.2) depends only on parameters ζ and f_0 of the reaction f , that appear in (1.11), and on the constants in the bounds of Proposition 2.

Proof. – The proof is exactly the same as for Theorem 6 for percolating flows. We need only to replace θ_1 with s_1 , θ_4 with s_0 , and set $c_j = 2h$, $h_j = h$. \square

The estimate (6.2) works well if there is a significant change of the temperature along the streamlines within the cell. But it has a serious flaw if the temperature drops gradually and there is little change of temperature inside any cell. The factor $(s_0 - s_1)^3$ on the right hand side of the estimate makes it rather inefficient. Our next goal is to derive an estimate which has linear dependence on the temperature drop when the drop is small. Our main measurement tool for the temperature within the cell will be the following average

$$\langle T \rangle_{\xi_0} = \frac{1}{2AF} \int_{\xi_0-A}^{\xi_0+A} d\xi \int_h^{3h} k(\rho) T(\rho, \xi) d\rho.$$

We will normally take A so that the region of averaging in ξ covers about half of the width of the strip when $\xi_0 = 0$ or $\xi_0 = L$, hence $A \approx H$. Our measure of the temperature change along the cell will be the difference between such averages for different ξ_0 .

THEOREM 9. – *Assume that for all ξ in a given cell we have*

$$\frac{1}{F} \int_h^{3h} k(\rho) T(\rho, \xi) d\rho \in [\theta_1, \theta_4].$$

Then for any ξ_0, ξ_1 we have for $A \geq h$

$$\begin{aligned} & \int_{\xi_0-A}^{\xi_1+A} \int_h^{3h} \left(T_t + \kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T) \right) E_1 E_2 d\xi d\rho \\ & \geq C(f_0, \zeta) \left(1 + \frac{l}{h} \right)^{-1} |\langle T \rangle_{\xi_0} - \langle T \rangle_{\xi_1}| F, \end{aligned} \tag{6.3}$$

where C depends only on f_0, ζ and constants in the bounds of Proposition 2.

Proof. – We will consider the case where $\langle T \rangle_{\xi_0} > \langle T \rangle_{\xi_1}$, the other case being similar. Let us integrate

$$T_t + u \cdot \nabla T - \kappa \Delta T = \frac{v_0^2}{\kappa} f(T)$$

in x and y over the region where ξ varies from ξ_2 to ξ_3 , where $\xi_2 \in [\xi_0 - A, \xi_0 + A]$, $\xi_3 \in (\xi_1 - A, \xi_1 + A)$, and ρ takes values between h and $3h$, with kernel $G(h, \rho - 2h)$. We obtain

$$\begin{aligned} & \int_{\xi_2}^{\xi_3} d\xi \int_h^{3h} d\rho G(h, \rho - 2h) E_1 E_2 T_t(\rho, \xi) - \kappa \int_{\xi_2}^{\xi_3} d\xi \int_h^{3h} d\rho G(h, \rho - 2h) E_1 E_2 \Delta T \\ & \geq \int_h^{3h} d\rho k(\rho) (T(\rho, \xi_2) - T(\rho, \xi_3)). \end{aligned} \tag{6.4}$$

As usual, our goal is to control the Laplacian term. Rewrite it in a familiar form

$$\frac{\kappa}{h} \int_0^h d\delta \left\{ \int_{\xi_2}^{\xi_3} d\xi \left[\frac{\partial T}{\partial \rho} \omega(\xi, 2h + \delta) - \frac{\partial T}{\partial \rho} \omega(\xi, 2h - \delta) \right] + \int_{2h-\delta}^{2h+\delta} d\rho \left[\frac{\partial T}{\partial \xi} \omega^{-1}(\xi_3, \rho) - \frac{\partial T}{\partial \xi} \omega^{-1}(\xi_2, \rho) \right] \right\}. \tag{6.5}$$

We carry out two more averagings in (6.4)

$$\frac{1}{4A^2} \int_{\xi_0-A}^{\xi_0+A} d\xi_2 \int_{\xi_1-A}^{\xi_1+A} d\xi_3$$

to be able to estimate the second part of the Laplacian term (6.5). Let us start by estimating the first expression in square brackets, more precisely,

$$\frac{\kappa}{h} \int_0^h d\delta \int_{\xi_2}^{\xi_3} d\xi \frac{\partial T}{\partial \rho} \omega(\xi, 2h + \delta)$$

(the other part is estimated similarly). Notice that by the assumption of the theorem for every ξ there exists ρ (depending on ξ) such that $T(\rho, \xi) \in [\theta_1, \theta_4]$. The estimate of this term now follows step by step the estimate of the same term in the proof of Theorem 6. We get that for every $\xi \in [\xi_0 - A, \xi_1 + A]$,

$$\frac{\kappa}{h} \int_0^h d\delta \frac{\partial T}{\partial \rho} \omega(\xi, 2h + \delta) \leq C f^{-1/2} \zeta^{-1} \frac{\kappa}{v_0 h} \int_h^{3h} \left[\kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T) \right] E_1 E_2 d\rho. \tag{6.6}$$

The integrations in $\xi_{2,3}$ simply average out, they are not needed for this term.

Let us now consider the estimate of the second expression in square brackets in (6.5), more particularly the first summand (the second one is estimated in the same way). Averaging in ξ_2 simply disappears since there is no dependence on this variable, and we are left with

$$\frac{\kappa}{2hA} \int_0^h d\delta \int_{2h-\delta}^{2h+\delta} d\rho \int_{\xi_1-A}^{\xi_1+A} d\xi_3 \frac{\partial T}{\partial \xi} \omega^{-1}(\xi_3, \rho).$$

The following lemma is the crucial step in the proof.

LEMMA 8. – *Under conditions of Theorem 9 we have*

$$\begin{aligned} & \frac{\kappa}{2hA} \int_0^h d\delta \int_{2h-\delta}^{2h+\delta} d\rho \int_{\xi_1-A}^{\xi_1+A} d\xi_3 \frac{\partial T}{\partial \xi} \omega^{-1}(\xi_3, \rho) \\ & \leq C f_0^{-1/2} \zeta^{-1} \frac{\kappa}{h v_0} \int_D \left[\kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T) \right] dx dy, \end{aligned} \tag{6.7}$$

where the constant C depends only on the bounds in Proposition 2.

Proof. – Integrating by parts and using (6.1), we find that

$$\left| \int_{\xi_1-A}^{\xi_1+A} d\xi_3 \frac{\partial T}{\partial \xi} \omega^{-1}(\xi_3, \rho) \right| \leq C \left(1 + \frac{A}{h} \right) \tag{6.8}$$

and therefore

$$\frac{\kappa}{2hA} \left| \int_0^h d\delta \int_{2h-\delta}^{2h+\delta} d\rho \int_{\xi_1-A}^{\xi_1+A} d\xi_3 \frac{\partial T}{\partial \xi} \omega^{-1}(\xi_3, \rho) \right| \leq C\kappa \left(\frac{h}{A} + 1 \right) \leq C\kappa. \tag{6.9}$$

We have to consider several cases.

Option 1. There exists ρ_0 such that for all $\xi \in [\xi_1 - A, \xi_1 + A]$, we have $T(\rho_0, \xi) \notin [\theta_1 - \zeta/2, \theta_4 + \zeta/2]$. By mean value theorem, for every ξ , there also exists $\rho_1(\xi)$ such that $T(\rho_1, \xi) \in [\theta_1, \theta_4]$. Then for every ξ we can find $\rho_2 > \rho_1$ such that $|T(\rho_2, \xi) - T(\rho_3, \xi)| = \zeta/2$, and for every $\rho \in [\rho_2, \rho_3]$, $T(\rho, \xi) \in [\theta_1 - \zeta/2, \theta_4 + \zeta/2]$. Therefore, as we have seen before, for every $\xi \in [\xi_1 - A, \xi_1 + A]$ we have

$$\left(\int_h^{3h} d\rho T_\rho^2 \right)^{1/2} \left(\int_h^{3h} d\rho f(T) \right)^{1/2} \geq \frac{\zeta f_0^{1/2}}{2}.$$

Hence, using Cauchy–Schwartz and integrating in ξ , we get

$$\int_h^{3h} d\rho \int_{\xi_1-A}^{\xi_1+A} d\xi E_1 E_2 \left(\kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T) \right) \geq \frac{v_0 \zeta f_0^{1/2} A}{2}.$$

From this inequality and (6.9) our lemma follows since $A \geq h$.

Option 2. For every ρ , there exists ξ_4 such that $T(\rho, \xi_4) \in [\theta_1 - \zeta/2, \theta_4 + \zeta/2]$. Here we have to consider two distinct sets of ρ . First, assume that $T(\rho, \xi) \in [\theta_1 - \zeta, \theta_4 + \zeta]$ for all ξ . Denote the set of all such ρ by S_1 . For $\rho \in S_1$ we have

$$\int_{\xi_1-A}^{\xi_1+A} f(T) d\xi \geq C f_0 \int_{\xi_1-A}^{\xi_1+A} \omega^{-2}(\rho, \xi) d\xi,$$

and so

$$\begin{aligned} \left| \int_{\xi_1-A}^{\xi_1+A} \frac{\partial T}{\partial \xi} \omega^{-1}(\rho, \xi) d\xi \right| &\leq C f_0^{-1/2} \left(\int_{\xi_1-A}^{\xi_1+A} f(T) d\xi \right)^{1/2} \left(\int_{\xi_1-A}^{\xi_1+A} T_\xi^2 d\xi \right)^{1/2} \\ &\leq C f_0^{-1/2} v_0^{-1} \int_{\xi_1-A}^{\xi_1+A} \left[\kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T) \right] E_1 E_2 d\xi. \end{aligned} \tag{6.10}$$

The second case is that there exists $\xi_4 \in [\xi_1 - A, \xi_1 + A]$ such that $T(\rho, \xi_4) \notin [\theta_1 - \zeta, \theta_4 + \zeta]$. Denote the set of all such ρ by S_2 . For $\rho \in S_2$, we can find ξ_5 and ξ_6 such that $|T(\rho, \xi_5) - T(\rho, \xi_6)| = \zeta/2$, and $T(\rho, \zeta) \in [\theta_1 - \zeta, \theta_4 + \zeta]$ for all ξ between ξ_5 and ξ_6 . In this case, similarly to the above reasoning, we have

$$\int_{\xi_1-A}^{\xi_1+A} f(T(\rho, \xi)) \, d\xi \int_{\xi_1-A}^{\xi_1+A} T_\xi^2(\rho, \xi) \, d\xi \geq C \zeta^2 f_0,$$

and so

$$f_0^{-1/2} \zeta^{-1} v_0^{-1} \int_{\xi_1-A}^{\xi_1+A} \left[\kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T) \right] E_1 E_2 \, d\xi \geq C.$$

Then (6.8) implies that for $\rho \in S_2$ we have

$$\left| \int_{\xi_1-A}^{\xi_1+A} d\xi_3 \frac{\partial T}{\partial \xi} \omega^{-1}(\xi_3, \rho) \right| \leq C \left(1 + \frac{A}{h} \right) f_0^{-1/2} \zeta^{-1} v_0^{-1} \int_{\xi_1-A}^{\xi_1+A} \left[\kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T) \right] E_1 E_2 \, d\xi. \tag{6.11}$$

Combining the two estimates (6.10) and (6.11), and taking into account that $A \geq h$, we obtain the result of Lemma 8. \square

Now we can finish the proof of Theorem 9. Taking into account (6.6) and (6.7) we see that

$$\begin{aligned} & \int_{\xi_0-A}^{\xi_1+A} d\xi \int_h^{3h} d\rho G(h, \rho - 2h) E_1 E_2 T_t(\rho, \xi) \\ & + C f_0^{-1/2} \zeta^{-1} \frac{\kappa}{v_0 h} \int_{\xi_0-A}^{\xi_1+A} d\xi \int_h^{3h} d\rho E_1 E_2 \left[\kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T) \right] \\ & \geq \frac{1}{4A^2} \int_{\xi_0-A}^{\xi_0+A} d\xi_2 \int_{\xi_1-A}^{\xi_1+A} d\xi_3 \int_h^{3h} d\rho k(\rho) (T(\rho, \xi_2) - T(\rho, \xi_3)), \end{aligned}$$

and this implies

$$\int_{\xi_0-A}^{\xi_1+A} \int_h^{3h} \left(T_t + \kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T) \right) E_1 E_2 \, d\xi \, d\rho \geq C(f_0, \zeta) \left(1 + \frac{l}{h} \right)^{-1} |\langle T \rangle_{\xi_0} - \langle T \rangle_{\xi_1}| F.$$

\square

7. Cellular flows: Diffusive estimate

Our goal in this section is to estimate the burning rate from below in terms of the jump of the temperature across the interface separating two cells. We will only consider this

estimate in the context of the particular cellular flow we are studying, though it can be easily extended to a more general situation. Consider two neighboring cells, which we denote C_{n-1} and C_n . We will look at two regions $D_{2n-1} \subset C_{n-1}$ and $D_{2n} \subset C_n$ which are symmetric under reflection with respect to the line separating the cells (see Fig. 5). The region D_{2n} is bounded by the curves $\rho = h, \rho = 3h, \xi = -A$, and $\xi = A$. For simplicity, we choose ρ and ξ coordinates in cell C_{n-1} so that ρ changes from $-3h$ to $-h$ and ξ from $-A$ to A on D_{2n-1} (see the figure). Notice that this is different from the choice of coordinates we employed locally in each cell in the previous section; in terms of the old coordinates, $D_{2n-1} \subset C_{n-1}$ is bounded by the curves $\rho = h, \rho = 3h, \xi = L - A, \xi = L + A$. With the new choice of coordinates, we denote by I_n the part of $C_{n-1} \cup C_n$ bounded by the curves $\rho = -3h, \rho = 3h, \xi = -A$, and $\xi = A$. We also denote, in the extension of notation of the previous section,

$$\langle T \rangle_{2n-1} = \frac{1}{2AF} \int_{D_{2n-1}} T(\rho, \xi) k(\rho) d\xi d\rho, \tag{7.1}$$

$$\langle T \rangle_{2n} = \frac{1}{2AF} \int_{D_{2n}} T(\rho, \xi) k(\rho) d\xi d\rho \tag{7.2}$$

($k(\rho)$ is defined in a natural way as $k(-\rho)$ when $\rho < 0$).

THEOREM 10. – *There exist constants $C_{1,2}$ depending only on the constants in the bounds of Proposition 2, such that*

$$\kappa \int_{I_n} |\nabla T|^2 dx dy \geq \frac{C_1 \kappa H}{h} (\langle T \rangle_{2n} - \langle T \rangle_{2n-1})^2 \tag{7.3}$$

for $A = C_2 H$.

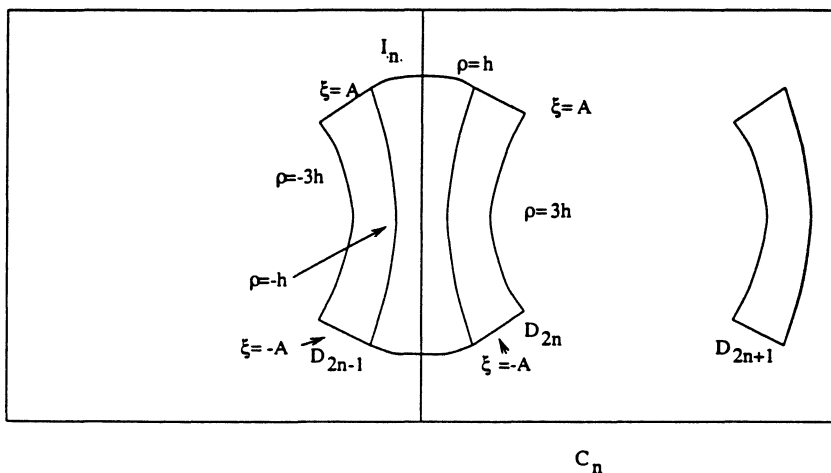


Fig. 5. The regions D_n .

Proof. – Notice that

$$\begin{aligned} & \left| \frac{1}{2AF} \int_{-A}^A d\xi \left(\int_h^{3h} k(\rho) T(\rho, \xi) d\rho - \int_{-h}^{-3h} k(\rho) T(\rho, \xi) d\rho \right) \right| \\ & \leq \frac{1}{2AF} \int_{-A}^A d\xi \int_h^{3h} k(\rho) d\rho \int_{-3h}^{3h} \left| \frac{\partial T}{\partial \rho}(\gamma, \xi) \right| d\gamma \\ & \leq \left(\frac{3h}{A} \right)^{1/2} \left(\int_{-A}^A \int_{-3h}^{3h} \left| \frac{\partial T}{\partial \rho}(\rho, \xi) \right|^2 d\rho \right)^{1/2} \leq C \frac{h^{1/2}}{H^{1/2}} \left(\int_{I_n} |\nabla T|^2 dx dy \right). \end{aligned}$$

Comparing the quantity we estimated with the definitions (7.1) and (7.2), we see that (7.3) follows. \square

8. Cellular flows: Reactive estimate

It is worthy to note that the diffusive estimate we proved in the last section is quadratic in the drop of the temperature over the interface. With the estimates we currently have we could not prove any lower bound for the burning rate, since the temperature could stay constant inside the cells (so that advective estimate does not give us anything) and drop in extremely small increments over the diffusive interfaces. There is no lower bound for such scenario because of the quadratic dependence. But in this case, the region where $T \in [\theta_1, \theta_4]$ would be very large, and hence we can hope to get a lower bound on $\int f(T)$. The following theorem is a rigorous expression of the above idea. We are mostly interested in the case $H \geq \kappa/v_0$ but include the case $H \leq \kappa/v_0$ for completeness.

THEOREM 11. – Assume that in a given cell C_n ,

$$\frac{1}{F} \int_h^{3h} T(\rho, \xi) d\rho \in [\theta_1, \theta_4]$$

for every ξ . Then

$$\int_{C_n} \left[\kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T) \right] dx dy \geq C(f_0, \zeta) v_0 H \min \left(1, \frac{H v_0}{\kappa} \right). \tag{8.1}$$

Proof. – The proof uses an argument we already used several times when proving advective estimate. Consider a region in C_n bounded by the curves $\rho = h$ and $\rho = H/2$. By mean value theorem, for every ξ , there exists $\rho_0 \in [h, 3h]$ where $T(\rho_0, \xi) \in [\theta_1, \theta_4]$. All ξ fall into two cases. In the first case, $T(\rho, \xi) \in [\theta_1 - \zeta, \theta_4 + \zeta]$ for every ρ in the region $\rho \in [h, H/2]$. Then

$$\frac{v_0^2}{\kappa} \int_h^{H/2} f(T(\rho, \xi)) d\rho \geq \frac{f_0 H v_0^2}{\kappa}.$$

In the second case, there also exists $\rho_1 \in [h, H/2]$ such that $T(\rho_1, \xi) \notin [\theta_1 - \zeta, \theta_4 + \zeta]$. In this case we can find ρ_2, ρ_3 such that $|T(\rho_2, \xi) - T(\rho_3, \xi)| \geq \zeta$, and for every ρ between ρ_2 and ρ_3 , we have $T(\rho, \xi) \in [\theta_1 - \zeta, \theta_4 + \zeta]$. In this case, by the usual argument, we have

$$f_0^{1/2} \zeta \leq \left(\int_h^{H/2} f(T) \, d\rho \int_h^{H/2} |\nabla T|^2 \, d\rho \right)^{1/2} \leq \frac{1}{2v_0} \int_h^{H/2} \left[\kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T) \right] \, d\rho.$$

It is easy to show following Lemma 7 and Proposition 2 that the length of the interval of integration in ξ , $2L$, satisfies $2L \geq CH$, where C is some universal constant. Integrating over ξ , we then get the result of the theorem. \square

9. Cellular flows: Putting it together

Now we have all necessary estimates to establish the lower bound on burning rate in the case of cellular flows. We begin with an auxiliary computation. Its goal is to choose the right value of h depending on other physical parameters fixed in the problem. The argument below may not be completely rigorous; we will fill in the gaps in the actual proof. Consider the sequence of averages (7.1), (7.2) introduced in Section 7 devoted to the diffusive estimate:

$$\dots, \langle T \rangle_{2n}, \langle T \rangle_{2n+1}, \langle T \rangle_{2(n+1)}, \langle T \rangle_{2n+3}, \dots,$$

where n varies from $-\infty$ to ∞ . The values of the averages tend to 1 as $n \rightarrow -\infty$ and to 0 as $n \rightarrow \infty$. Assume that (for sufficiently large U) the change is gradual, and there exists a number of consecutive numbers n where all averages lie in the interval $[\theta_1, \theta_4]$. Moreover, assume that in all cells corresponding to these values of n , we have

$$\frac{1}{F} \int_h^{3h} k(\rho) T(\rho, \xi) \, d\rho \in [\theta_1, \theta_4]$$

for all ξ , so that the reactive and linear advective estimates may be applied in these cells. It does not concern us here that h has to be chosen yet; as we mentioned above, this is an auxiliary computation and the rigorous argument will appear in the proof. Let us denote

$$\delta T_{n,\alpha} = |\langle T \rangle_{2n+1} - \langle T \rangle_{2n}|$$

the change of the averages controlled by the advective estimate, and

$$\delta T_{n,d} = |\langle T \rangle_{2(n+1)} - \langle T \rangle_{2n+1}|$$

the drop of the temperature controlled by diffusive estimate. We also set $\delta T_n = \delta T_{n,\alpha} + \delta T_{n,d}$ which we call the total drop over n th cell. Then we have, according to the advective

estimate (6.3),

$$\int_{C_n} \left(T_t + \kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T) \right) \frac{dx dy}{H} \geq C(f_0, \zeta) \left(1 + \frac{\kappa}{v_0 h} \right)^{-1} \frac{U h}{H} \delta T_{n,a}, \tag{9.1}$$

where the constant C depends only on f_0, ζ and fixed constants associated with the geometry of streamlines of the flow. According to the diffusive estimate (7.3), we also have

$$\int_{C_n \cup C_{n+1}} \left(\kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T) \right) \frac{dx dy}{H} \geq C \frac{\kappa}{h} \delta T_{n,d}^2. \tag{9.2}$$

Also for every C_n from the region we consider, we have by the reactive estimate (8.1) that

$$\int_{C_n} \left(\kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T) \right) \frac{dx dy}{H} \geq C(f_0, \zeta) v_0 \min \left(1, \frac{H v_0}{\kappa} \right) = C(f_0, \zeta) v_0 \tag{9.3}$$

under the assumption $H v_0 / \kappa > 1$ (see (4.5)). Fix some cell C_n , and introduce a parameter $0 \leq a_n \leq 1$ such that

$$a_n \delta T_n = \delta T_{n,d}, \quad (1 - a_n) \delta T_n = \delta T_{n,a}.$$

According to (9.1), (9.2), and (9.3), we have

$$\begin{aligned} & \int_{C_n \cup C_{n+1}} \left(\kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T) \right) \frac{dx dy}{H} \\ & \geq C \left[\left(1 + \frac{\kappa}{v_0 h} \right)^{-1} \frac{U h}{H} \delta T_n (1 - a_n) + \frac{\kappa a_n^2}{h} \delta T_n^2 + v_0 \right]. \end{aligned} \tag{9.4}$$

Over our sequence of cells, the value of temperature averages falls by a fixed amount, $\theta_4 - \theta_1$. We are going to assume that this fall is gradual, and consider the lower bound on the contribution of the cells C_n and C_{n+1} to the total burning rate normalized by the temperature falloff δT_n over the cell C_n . Namely, denote

$$V_n = \int_{C_n \cup C_{n+1}} \left(T_t + \kappa |\nabla T|^2 + \frac{v_0^2}{\kappa} f(T) \right) \frac{dx dy}{H},$$

then the burning rate V satisfies

$$V \geq \frac{1}{6} \sum_n V_n.$$

Eq. (9.4) may be rewritten as

$$V_n \geq C \left[\left(1 + \frac{\kappa}{v_0 h} \right)^{-1} \frac{U h}{H} (1 - a_n) + \frac{\kappa a_n^2}{h} \delta T_n + \frac{v_0}{\delta T_n} \right] \delta T_n. \tag{9.5}$$

Moreover,

$$\sum \delta T_n \geq \theta_4 - \theta_1,$$

where summation is taken over the set of cells where all estimates apply. In the lower bound (9.5), a_n and $|\delta T_n|$ are out of our control, but we may choose h optimally. Hence if we denote

$$B(\kappa, v_0, U, H) = \max_{0 \leq h \leq H/6} \left\{ \min_{\substack{0 \leq a_n \leq 1, \\ 0 \leq \delta T_n \leq 2}} \left(\left(1 + \frac{\kappa}{v_0 h} \right)^{-1} \frac{U h}{H} (1 - a_n) + \frac{\kappa a_n^2}{h} \delta T_n + \frac{v_0}{\delta T_n} \right) \right\},$$

then

$$V \geq C B(\kappa, v_0, U, H) (\theta_4 - \theta_1).$$

Therefore our goal is to find $B(\kappa, v_0, U, H)$. The minimum in δT_n is achieved when

$$\delta T_n = \min \left(2, \frac{1}{a_n} \sqrt{\frac{v_0 h}{\kappa}} \right).$$

Let us consider two different regimes.

(1) If $\kappa/v_0 h \leq 1$ then the minimum is achieved for $\delta T_n \geq 1$ and

$$B(\kappa, v_0, U, H) \geq C \max_{0 \leq h \leq H/3} \left\{ \min_{0 \leq a_n \leq 1} \left(\frac{U h}{H} (1 - a_n) + \frac{\kappa a_n^2}{h} + v_0 \right) \right\},$$

where C is a universal constant. Choose h out of the condition $U h/H = \kappa/h$, so that

$$h = \sqrt{\frac{\kappa H}{U}}. \tag{9.6}$$

Then evidently

$$B(\kappa, v_0, U, H) \geq C \left(\sqrt{\frac{\kappa U}{H}} + v_0 \right) = C v_0 \left(\sqrt{\frac{\tau_c}{\tau_u}} + 1 \right)$$

with τ_c and τ_u defined in (4.6). Given (9.6), condition $\kappa/v_0 h \leq 1$ translates into

$$\frac{1}{v_0} \sqrt{\frac{\kappa U}{H}} = \frac{\tau_c}{\tau_u} \leq 1.$$

For this computation to apply, we also need to ensure that $h \leq H/6$, that is,

$$\sqrt{\frac{\kappa}{U H}} \leq 1/6,$$

so that h is in the acceptable range. This is a condition on the Peclet number. All our bounds will remain valid if replace the choice of h by Ch with C in some fixed range;

we just have to adjust the universal constants. Therefore, for presentation purposes we will henceforth require the condition (4.4)

$$Pe = \sqrt{\frac{UH}{\kappa}} \geq 1.$$

(2) If $\frac{\kappa}{v_0 h} \geq 1$ then, since $\delta T_n = \min(2, \frac{1}{a_n} \sqrt{\frac{v_0 h}{\kappa}})$, we have that

$$B(\kappa, v_0, U, H) \geq \max_{0 \leq h \leq H/6} \min_{0 \leq a_n \leq 1} g(a_n),$$

where

$$g(a_n) = \begin{cases} \frac{U h^2 v_0}{\kappa H} (1 - a_n) + \frac{2\kappa a_n^2}{h} + \frac{v_0}{2}, & a_n \leq \frac{1}{2} \sqrt{\frac{v_0 h}{\kappa}}, \\ \frac{U h^2 v_0}{\kappa H} (1 - a_n) + 2a_n \sqrt{\frac{v_0 \kappa}{h}}, & a_n \geq \frac{1}{2} \sqrt{\frac{v_0 h}{\kappa}}. \end{cases}$$

Note that

$$\begin{aligned} & \max_{0 \leq h \leq H/6} \min_{0 \leq a_n \leq 1} \left(\frac{U h^2 v_0}{\kappa H} (1 - a_n) + \frac{2\kappa a_n^2}{h} + \frac{v_0}{2} \right) \\ & \geq C \left((U v_0 H^{-1} \kappa)^{1/3} + v_0 \right) = C v_0 \left(\left(\frac{\tau_c}{\tau_u} \right)^{1/3} + 1 \right), \end{aligned}$$

since we can choose h from $U h^2 v_0 / (\kappa H) = \kappa / h$, which gives

$$h = \left(\frac{\kappa^2 H}{u v_0} \right)^{1/3}. \tag{9.7}$$

Also

$$\max_{0 \leq h \leq H/3} \min_{0 \leq a_n \leq 1} \left(\frac{U h^2 v_0}{\kappa H} (1 - a_n) + 2a_n \sqrt{\frac{v_0 \kappa}{h}} \right) \geq C (U v_0^3 \kappa H^{-1})^{1/5} = C v_0 \left(\frac{\tau_c}{\tau_u} \right)^{1/5},$$

since we can choose h from $U h^2 v_0 / (\kappa H) = \sqrt{v_0 \kappa / h}$, which gives

$$h = \left(\frac{\kappa^3 H^2}{U^2 v_0} \right)^{1/5}. \tag{9.8}$$

Therefore,

$$\max_{0 \leq h \leq H/3} \min_{0 \leq a_n \leq 1} g(a_n) \geq C v_0 \min \left\{ \left(\left(\frac{\tau_c}{\tau_u} \right)^{1/3} + 1 \right), \left(\frac{\tau_c}{\tau_u} \right)^{1/5} \right\}.$$

Notice that $\tau_c / \tau_u \geq 1$ in the regime we consider, since τ_c / τ_u is also equal to $(\kappa / v_0 h)^3$ with h chosen according to (9.7) or $(\kappa / v_0 h)^{5/2}$ with h chosen according to (9.8).

Therefore, we get that the second regime is characterized by

$$\frac{\tau_c}{\tau_u} = \frac{1}{v_0} \sqrt{\frac{\kappa U}{H}} \geq 1,$$

and in this case

$$B(\kappa, v_0, U, H) \geq C v_0 \left(\frac{\tau_c}{\tau_u}\right)^{1/5}.$$

The choice of h is given by (9.8). In this regime, we also need to assume that

$$\left(\frac{\kappa^3}{U^2 H^3 v_0}\right)^{1/5} \leq 1/6,$$

so that h is in the acceptable range. This, up to a constant, is a condition

$$\frac{l}{H} \leq \text{Pe}^2$$

which is satisfied provided (4.5) and (4.4) hold.

Now we are finally ready to give a proof of Theorem 7.

Proof. – Given the parameters κ, v_0, H and U , define h according to

$$h = \frac{1}{6} \sqrt{\frac{\kappa H}{U}}, \quad \tau_c/\tau_u \leq 1, \tag{9.9}$$

$$h = \frac{1}{6} \left(\frac{\kappa^3 H^2}{U^2 v_0}\right)^{1/5}, \quad \tau_c/\tau_u \geq 1. \tag{9.10}$$

These choices ensure that $h \leq H/6$ provided that (4.4), (4.5) are satisfied. Consider the smallest integer number m_1 such that $\langle T \rangle_i \leq \theta_4 - (\theta_4 - \theta_1)/10$ for all $i \geq m_1$. We need to consider several options. The first is taken care of by

LEMMA 9. – *If $\langle T \rangle_{m_1} \leq \theta_4 - (\theta_4 - \theta_1)/5$ then the bounds of Theorem 7 hold. Moreover, the same is true if for some $m, m + 1$, we have $\langle T \rangle_m, \langle T \rangle_{m+1} \in [\theta_1, \theta_4]$ and*

$$|\langle T \rangle_{m+1} - \langle T \rangle_m| \geq (\theta_4 - \theta_1)/10.$$

Proof. – Let us consider the case where $\langle T \rangle_{m_1} \leq \theta_4 - (\theta_4 - \theta_1)/5$, the other case is similar. If $m_1 = 2n$ is even, notice that by definition of m_1 , $\langle T \rangle_{2n-1} \geq \theta_4 - (\theta_4 - \theta_1)/10$. Then by the diffusive estimate (7.3) we obtain

$$V \geq \frac{1}{3} V_n \geq C \frac{\kappa}{h} (\theta_4 - \theta_1)^2.$$

In the case where $\tau_c/\tau_u \leq 1$ putting in h given by (9.9) gives exactly the bound (4.7) of Theorem 7, modulo $C_2 v_0$. But by Proposition 1, we can always add $C v_0$ to the lower bound on V . In the case where $\tau_c/\tau_u \geq 1$, putting in h given by (9.10) gives the lower

bound $C(\kappa^2 U^2 H^{-2} v_0)^{1/5} = C v_0 (\tau_c / \tau_u)^{2/5}$, which is even better than the bound (4.7) (modulo v_0). Hence, Theorem 7 also holds.

If $m_1 = 2n + 1$ is odd, then by definition of m_1 , $\langle T \rangle_{2n} \geq \theta_4 - (\theta_4 - \theta_1)/10$. Thus temperature falls inside the cell C_n , and we may use advective estimate of Theorem 8. We can find ξ_0, ξ_1 in the cell C_n such that

$$\frac{1}{F} \int_h^{3h} k(\rho) T(\rho, \xi_0) d\rho = \theta_4 - \frac{\theta_4 - \theta_1}{10}, \quad \frac{1}{F} \int_h^{3h} k(\rho) T(\rho, \xi_1) d\rho = \theta_4 - \frac{\theta_4 - \theta_1}{5},$$

and

$$\frac{1}{F} \int_h^{3h} k(\rho) T(\rho, \xi) d\rho \in \left[\theta_4 - \frac{\theta_4 - \theta_1}{5}, \theta_4 - \frac{\theta_4 - \theta_1}{10} \right]$$

for every ξ between ξ_0 and ξ_1 . By the advective estimate (6.2), we get

$$V \geq \frac{1}{3} V_n \geq C(\zeta, f_0) \left(1 + \frac{\kappa}{v_0 h} \right)^{-1} (\theta_4 - \theta_1)^3 \frac{U h}{H}.$$

Direct substitution of the expression (9.9) or (9.10) for h depending on the value of τ_c / τ_u and comparison of the above bound with (4.7) gives the conclusion of Theorem 7. The proof of the second statement of this lemma is parallel to the above argument. \square

Lemma 9 proves Theorem 7 unless there exists a sequence m_1, \dots, m_2 (of length at least 8, in fact) such that for every $m_1 \leq m \leq m_2$.

$$\langle T \rangle_m \in \left[\theta_1 + \frac{\theta_4 - \theta_1}{10}, \theta_4 - \frac{\theta_4 - \theta_1}{10} \right],$$

and for $m = m_1, \dots, m_2 - 1$

$$|\langle T \rangle_{m+1} - \langle T \rangle_m| \leq \frac{\theta_4 - \theta_1}{10}.$$

Therefore there exists a sequence of at least three (or more) consecutive cells C_{n_1}, \dots, C_{n_2} such that and

$$\langle T \rangle_{2n_1} \geq \theta_4 - \frac{3}{10}(\theta_4 - \theta_1), \langle T \rangle_{2n_2+1} \leq \theta_1 + \frac{3}{10}(\theta_4 - \theta_1), \tag{9.11}$$

and

$$\langle T \rangle_m \in \left[\theta_4 - \frac{\theta_4 - \theta_1}{10}, \theta_1 + \frac{\theta_4 - \theta_1}{10} \right] \tag{9.12}$$

for every m such that $2n_1 \leq m \leq 2n_2 + 1$. Assume that there exists a cell C_n with $n_1 \leq n \leq n_2$ where we can find ξ_0 so that

$$\int_h^{3h} k(\rho)T(\rho, \xi_0) d\rho \notin [\theta_1, \theta_4].$$

By (9.12) and mean value theorem we can also find ξ_1 in this cell such that

$$\int_h^{3h} k(\rho)T(\rho, \xi_1) d\rho \in \left[\theta_1 + \frac{\theta_4 - \theta_1}{10}, \theta_4 - \frac{\theta_4 - \theta_1}{10} \right].$$

Therefore, the advective estimate (6.2) can be applied in this cell, giving

$$V_n \geq C(\zeta, f_0) \left(1 + \frac{\kappa}{v_0 h} \right)^{-1} (\theta_4 - \theta_1)^3 \frac{U h}{H}.$$

Hence, similarly to the proof of Lemma 9. Theorem 7 holds in this case. The only case left to consider is the case where for every $n_1 \leq n \leq n_2$, for every ξ in a cell C_n , we have

$$\int_h^{3h} k(\rho)T(\rho, \xi) d\rho \in [\theta_1, \theta_4].$$

In this case the second advective estimate (6.3), as well as reactive estimate (8.1) apply in every cell C_n such that $n_1 \leq n_2$. Recall the notation

$$\begin{aligned} (1 - a_n)\delta T_n &= \delta T_{n,a} = |\langle T \rangle_{2n+1} - \langle T \rangle_{2n}|, \\ a_n \delta T_n &= \delta T_{n,d} = |\langle T \rangle_{2(n+1)} - \langle T \rangle_{2n+1}|. \end{aligned}$$

Following the computation we performed at the beginning of this section we get

$$V \geq \frac{1}{6} \sum_{n=n_1}^{n_2} V_n \geq C \sum_{n=n_1}^{n_2} \left[\left(\left(1 + \frac{\kappa}{v_0 h} \right)^{-1} \frac{U h}{H} (1 - a_n) + \frac{\kappa}{h} a_n^2 \delta T_n + v_0 \delta T_n^{-1} \right) \delta T_n \right]. \tag{9.13}$$

Consider the case where $\tau_c/\tau_u \geq 1$ (the other case is similar but simpler). Putting the expression for h from (9.10) into (9.13), we get

$$V \geq C \sum_{n=n_1}^{n_2} \left(\left[v_0 \left(\frac{\tau_c}{\tau_u} \right)^{1/5} (1 - a_n) + v_0 \left(\frac{\tau_c}{\tau_u} \right)^{2/5} a_n^2 \delta T_n + v_0 \delta T_n^{-1} \right] \delta T_n \right).$$

Since by (9.11), $\sum_{n=n_1}^{n_2} \delta T_n \geq 2(\theta_4 - \theta_1)/5$, we have

$$V \geq C v_0 \min_{0 \leq a_n \leq 1, 0 \leq \delta T_n \leq 2} \left[\left(\frac{\tau_c}{\tau_u} \right)^{1/5} (1 - a_n) + \left(\frac{\tau_c}{\tau_u} \right)^{2/5} a_n^2 \delta T_n + \delta T_n^{-1} \right]. \tag{9.14}$$

It remains to show that the expression in square brackets in (9.14) is always greater or equal to $Cv_0(\tau_c/\tau_u)^{1/5}$ (we can always add Cv_0 later to the lower bound for V by Proposition 1). If $a_n < 1/2$, the first term in the sum gives exactly the estimate we need (no matter what is the value of $\delta T_n \leq 1$). Hence it remains to consider the case where $a_n > 1/2$. In this case the sum of the second and third term in the square brackets is greater than or equal to

$$Cv_0 \left(\left(\frac{\tau_c}{\tau_u} \right)^{2/5} \delta T_n + \delta T_n^{-1} \right) \geq Cv_0 \left(\frac{\tau_c}{\tau_u} \right)^{1/5}$$

and this finishes the proof of Theorem 7. \square

Acknowledgement

We wish to thank Peter Constantin for initiating our collaboration on the subject, and for numerous useful discussions and advice. We are grateful to Henri Berestycki, Fausto Cattaneo, Albert Fannjiang, Francois Hamel and George Papanicolaou for interesting discussions. AK was supported by NSF grant DMS-9801530, and LR was supported by NSF grant DMS-9971742 and ASCI Flash Center at the University of Chicago.

REFERENCES

- [1] Audoly B., Berestycki H., Pomeau Y., Reaction-diffusion in fast steady flow, C.R. Acad. Sci., Ser. IIB, 328, 255–262.
- [2] Bensoussan A., Lions J.L., Papanicolaou G., Asymptotic Analysis for Periodic Structures, North-Holland, Amsterdam, 1978.
- [3] Berestycki H., Hamel F., Propagation of flames through vortical cells, preprint.
- [4] Berestycki H., Larrouturou B., Lions P.L., Multi-dimensional traveling wave solutions of a flame propagation model, Arch. Rational Mech. Anal 111 (1990) 33–49.
- [5] Berestycki H., Larrouturou B., Roquejoffre J.-M., Stability of traveling fronts in a model for flame propagation I: linear stability, Arch. Rational Mech. Anal. 117 (1992) 97–117.
- [6] Berestycki H., Nirenberg L., Some qualitative properties of solutions of semilinear equations in cylindrical domains, in: Rabinowitz P. et al. (Eds.), Analysis etc., Academic Press, 1990, pp. 115–164.
- [7] Berestycki H., Nirenberg L., Traveling fronts in cylinders, Annales de l’IHP, Analyse non linéaire 9 (1992) 497–572.
- [8] Clavin P., Williams F.A., Theory of pre-mixed flame propagation in large-scale turbulence, J. Fluid. Mech. 90 (1979) 589–604.
- [9] Constantin P., Kiselev A., Oberman A., Ryzhik L., Bulk burning rate in passive-reactive diffusion, Arch. Rat. Mech. Anal. 154 (2000) 53–91.
- [10] Embid P., Majda A., Souganidis P., Comparison of turbulent flame speeds from complete averaging and the G-equation, Phys. Fluids. 7 (1995) 2052–2060.
- [11] Embid P., Majda A., Souganidis P., Effective geometric from dynamics for premixed turbulent combustion with separated velocity scales, Combust. Sci. Tech. 103 (1994) 85.
- [12] Fannjiang A., Papanicolaou G., Convection enhanced diffusion for periodic flows, SIAM J. Appl. Math. 54 (1994) 333–408.
- [13] Fisher R., The wave of advance of advantageous genes, Ann. Eugenics 7 (1937) 355–369.

- [14] Freidlin M., Gärtner J., On the propagation of concentration waves in periodic and random media, *Soviet Math. Dokl.* 20 (1979) 1282–1286.
- [15] Freidlin M., Geometric optics approach to reaction-diffusion equations, *SIAM J. Appl. Math.* 46 (1986) 222–232.
- [16] Freidlin M., Limit theorems for large deviations and reaction-diffusion equations, *Ann. Probab.* 13 (1985) 639–675.
- [17] Hamel F., Formules min-max pour les vitesses d’ondes progressives multidimensionnelles, *Ann. Fac. Sci., Toulouse Math.* (6) 8 (1999) 259–280.
- [18] Heinze S., Papanicolaou G., Stevens A., Variational principles for propagation speeds in inhomogeneous media, *SIAM J. Appl. Math.*, to appear.
- [19] Kerstein A., Ashurst W., *Phys. Rev. Lett.* 68 (1992) 934.
- [20] Kerstein A., Simple derivation of Yakhot’s turbulent premixed flame speed formula, *Combust. Sci. Tech.* 60 (1988) 163–165.
- [21] Kagan L., Sivashinsky G., Makhviladze G., On flame extinction by a spatially periodic shear flow, *Combust. Theor. Model.* 2 (1998) 399–404.
- [22] Kagan L., Sivashinsky G., On flame propagation and extinction in large scale vortical flows, *Combustion and Flame* 120 (2000) 222–232.
- [23] Kolmogorov A.N., Petrovskii I.G., Piskunov N.S., Étude de l’équation de la chaleur de matière et son application à un problème biologique, *Bull. Moskov. Gos. Univ. Mat. Mekh.* 1 (1937) 1–25 (see [27] pp. 105–130 for an English transl.).
- [24] Majda A., Souganidis P., Large scale front dynamics for turbulent reaction-diffusion equations with separated velocity scales, *Nonlinearity* 7 (1994) 1–30.
- [25] Mallordy J.-F., Roquejoffre J.-M., A parabolic equation of the KPP type in higher dimensions, *SIAM J. Math. Anal.* 26 (1995) 1–20.
- [26] McLaughlin R., Zhu J., The effect of finite front thickness on the enhanced speed of propagation, *Combust. Sci. Tech.* 129 (1997) 89–112.
- [27] Pelcé P. (Ed.), *Dynamics of Curved Fronts*, Academic Press, 1988.
- [28] Protter M., Weinberger H., *Maximum Principles in Differential Equations*, Prentice-Hall, Englewood Cliffs, NJ, 1967.
- [29] Ronney P., Some open issues in premixed turbulent combustion, in: Buckmaster J., Takeno T. (Eds.), *Modeling in Combustion Science*, Springer-Verlag, Berlin, 1995.
- [30] Roquejoffre J.-M., Stability of traveling fronts in a model for flame propagation II: nonlinear stability, *Arch. Rat. Mech. Anal.* 117 (1992) 119–153.
- [31] Xin J., Existence of planar flame fronts in convective-diffusive periodic media, *Arch. Rat. Mech. Anal.* 121 (1992) 205–233.
- [32] Xin J., Existence and nonexistence of traveling waves and reaction-diffusion front propagation in periodic media, *J. Stat. Phys.* 73 (1993) 893–926.
- [33] Xin J., Analysis and modeling of front propagation in heterogeneous media, *SIAM Review* 42 (2000) 161–230.
- [34] Yakhot V., Propagation velocity of premixed turbulent flames, *Combust. Sci. Tech.* 60, 191–214.